


TT700



Labels for Life.

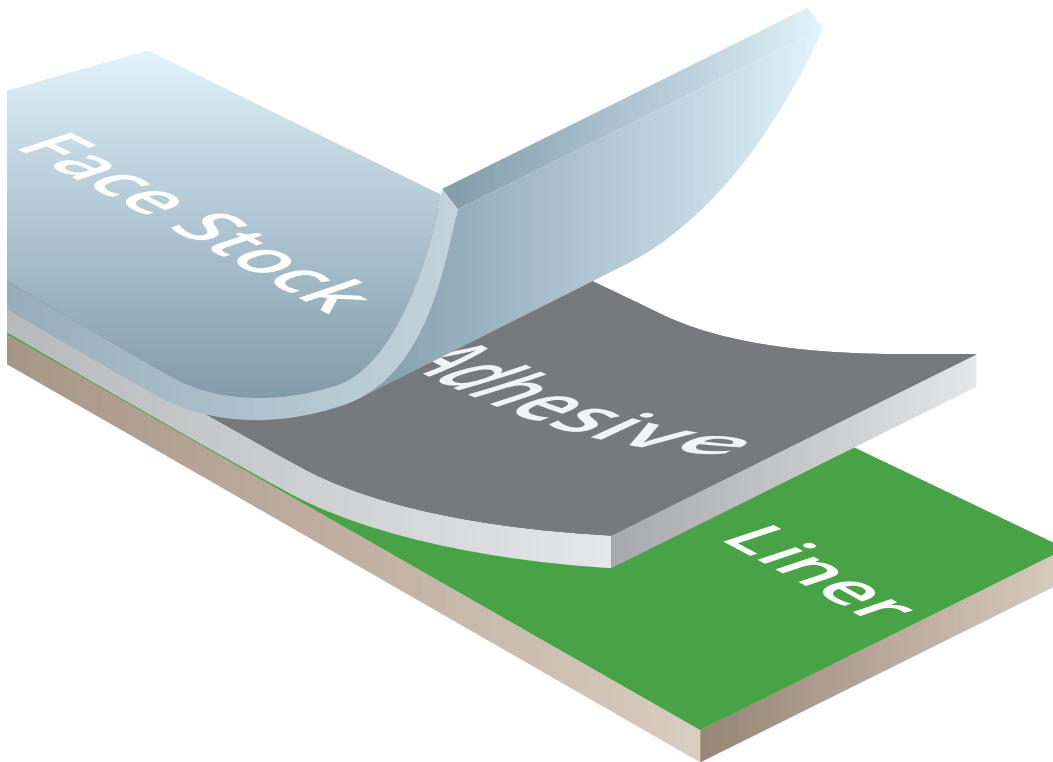

Face Stock: 2 mil topcoated gloss white polyester offers excellent abrasion and harsh chemical resistance. The material performs best on the topside of a circuit board where heat exposure is limited. The material will not shrink and is designed to be UV flexographic and thermal transfer printed

Adhesive: 0.8-0.9 mil high performance permanent acrylic adhesive offering excellent harsh chemical, smudge and abrasion resistance.

Release Liner: 50# kraft liner or a 1.5 mil polyester liner designed to offer excellent performance for both manual and automatic application.

Thermal Transfer Gloss White Polyester Film

TT700 is designed for UV flexographic with the option of thermal transfer printing. Key features include: indoor and outdoor applications and excellent smudge, solvent and abrasion resistance. When used in combination with the recommended IDENTCO printing, it will meet the most demanding durable labeling requirements.

Typical Applications

- Name plates
- Rating Plates
- Serial identification labels
- Industrial Barcodes
- Electronic Components Marking

Typical Industry Sectors

- Automotive
- Electronics
- Industrial




www.identco.com


TT700

Thermal Transfer Matte Silver Polyester Film




Labels for Life.

Agency Recognitions

 UL-MH16873/MH16225
 CSA-089882_L_000`

Adhesion



Stainless Steel	55 oz/in	605 N/m	Polypropylene	15 oz/in	165 N/m
Polycarbonate	77 oz/in	847 N/m	Glass	69 oz/in	759 N/m


Material Caliper



Face Stock	.0020"	50.8µ	Liner (kraft/FL)	.0030"/.0015"	76.2/38.1µ
Adhesive	.0008"/.0009"	20.3/22.9µ	Total Material	.0058"/.0044"	147.3/111.8µ

Exterior Durability


 Material Only: 2 Years
 Material w/ TTRR-D Ribbon: 2 Years

Temperature Range

 Service Temperature: -40°F to 302°F (-40°C to 150°C)
 Minimum Application Temperature: 50°F (10°C)


Shelf Life

 Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
 Shelf Life: 2 years @ recommended storage

Recommended Ribbons


Pre-printing	Thermal Transfer Printing
UV flexographic inks	TTRR-B TTRR-D (Blue) TTRR-D TTRR-S TTRR-V

Chemical Resistance


Chemical Agents	Material Only (w/o printing)	Printing (TTRR Ribbon)	Printing (Cotton swab rub)
Household Cleaners	Passed	Passed	Passed
Oil	Passed	Passed	Passed
Water	Passed	Passed	Passed
Isopropyl Alcohol	Passed	Passed	Passed
Mild Acid	Passed	Passed	Passed
Mineral Spirits	Passed	Passed	Passed
Toluene	Passed	Failed	Failed

Process Durability

 It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

- | | | | | |
|---|---|--|--|--|
| <p>UNITED STATES HEADQUARTERS
 28164 W. Concrete Drive
 Ingleside, IL 60041
 Phone: +1 (815) 385 - 0011
 Fax +1 (815) 385 - 0359</p> | <p>MEXICO MONTERREY
 Carr. a Laredo Km. 16.5 Interior
 14B, Col. Moisés Sáenz, 66613
 Apodaca, Nuevo Leon
 Phone: +52 (81) 8008 - 0438</p> | <p>GERMANY FRANKFURT
 Güterbahnhofstrasse 3-7
 63450 Hanau
 Phone: +49 (6181) 440 830 - 0
 Fax: +49 (6181) 440 830 - 99</p> | <p>PRC HONG KONG
 Unit 1708, 17/F, 9 Wing Hong St.
 Cheung Sha Wan, Kowloon
 Phone: +852 2959 2156
 Fax: +852 2959 2019</p> | <p>MALAYSIA PENANG
 Suite 163E, Level 16, Room 1602
 Hunza Tower Gurney Paragon
 Jalan Kelawai, Georgetown
 10250 Penang
 Phone: +6012 466 - 0866</p> |
|---|---|--|--|--|