

TT728




Labels for Life.

Face Stock: 3.0 mil ultra-smooth coated matte white paper, with optimized smudge-resistance.

Adhesive: 0.7-0.8 mil high-performance permanent emulsion acrylic adhesive.

Release Liner: 40# paper release liner designed for optimal performance.

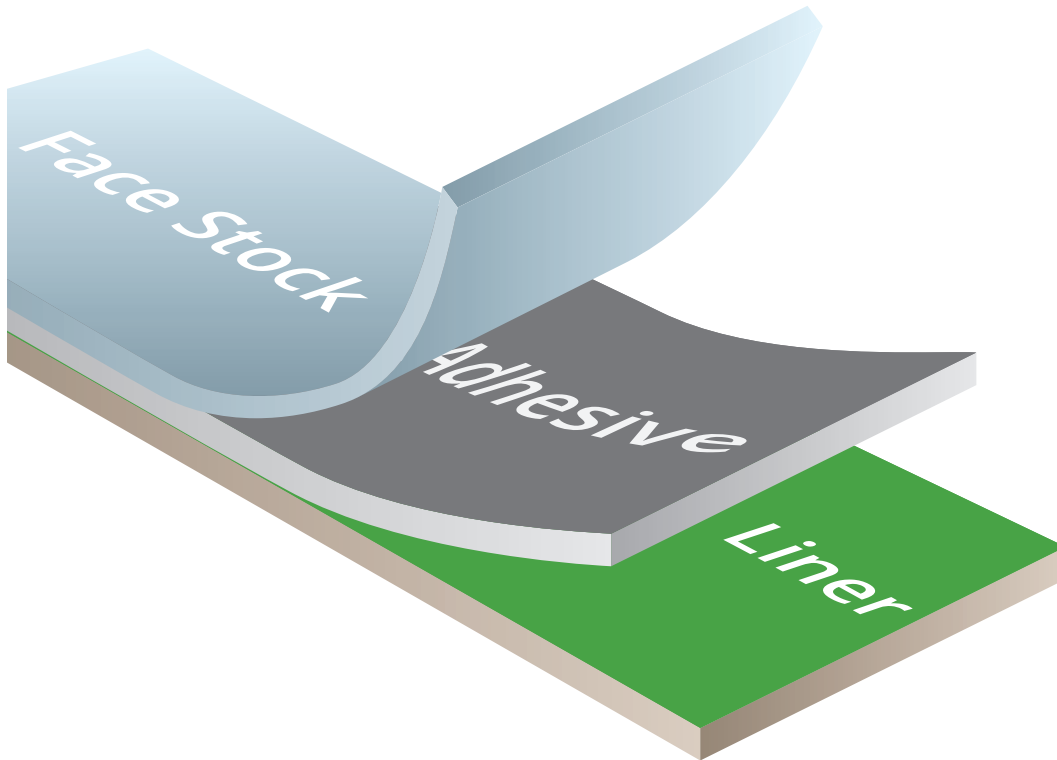

Thermal Transfer Matte White Paper

TT728 is specifically designed to be flexographic or thermal transfer printed. Key features include: indoor use only, excellent scratch and smudge resistance, adhesive that is designed to adhere in cold or high temperatures, and a matte finish. When used in combination with the recommended IDENTCO inks or ribbons, it will meet the most demanding durable labeling applications.

Typical Applications

- Lamp Ballasts
- Blank or Pre-printed Labels
- Cooler temperature applications if required

Typical Industry Sectors

- Automotive
- Electronics
- Industrial











www.identco.com

TT728

Thermal Transfer Matte
White Paper



Labels for Life.

	Agency Recognitions 100% RoHS Compliant
	Adhesion Rigid HDPE 25 oz/in 275 N/m Recycled Corrugated 15 oz/in 165 N/m Treated LDPE 21 oz/in 231 N/m Glass 48 oz/in 528 N/m
	Material Caliper Face Stock .0030" 76.2μ Adhesive .0007"- .0008" 17.78μ-20.3μ Liner(kraft) .0024" 61.0μ Total Material .0061"- .0062" 154.9μ-157.5μ
	Exterior Durability Recommended: Indoor use only.
	Temperature Range Service Temperature: -20 °F to 185 °F (-28 °C to 85 °C) Minimum Application Temperature: 37 °F (3 °C)
	Shelf Life Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H. Shelf Life: 1 year @ recommended storage
	Recommended Printing Pre-Printing • Flexographic printing Thermal Transfer Printing • TTR • TTRR-A
	Process Durability It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 04/12/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866