


TT733



Labels for Life.

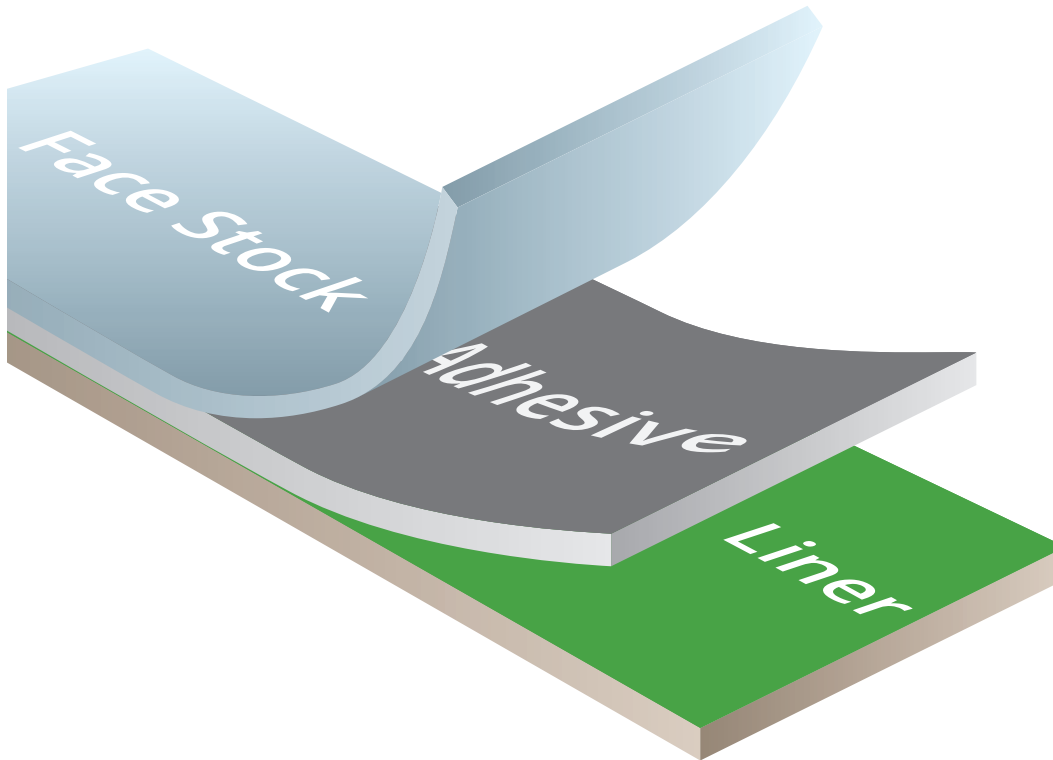

Face Stock: 2 mil semi-gloss destructible white vinyl offers excellent resistance to abrasion. The material is designed to be a tamper evident film. UV flexographic and thermal transfer printing.

Adhesive: 0.8 mil high performance permanent acrylic adhesive offering excellent conformability to adhere to a wide variety of surfaces due to its universal adhesive.

Release Liner: 55# kraft liner designed to offer excellent performance for manual application.

Thermal Transfer Semi-Gloss White Destructible Vinyl Film

TT733 is designed to destruct in applications where the label is attempted to be removed or is scratched rough and excessively. Key features include: tamper evident, indoor only applications and excellent smudge and abrasion resistance. When used in combination with the recommended IDENTCO UV flexographic inks and thermal transfer ribbons, it will meet the most demanding durable labeling requirements. The material is very conformable and will adhere to a wide variety of surfaces due to its universal adhesive.

Typical Applications

Name plates
Rating Plates
Industrial Barcodes
Some Tamper Evident Requirements

Typical Industry Sectors

Automotive
Electronics
Industrial




www.identco.com

TT733

Thermal Transfer Semi-Gloss
White Destructible Vinyl Film




Labels for Life.

 **Agency Recognitions**
UL-MH16873


 **Adhesion**


Stainless Steel	Material destroys/breaks during testing	Polypropylene	Material destroys/breaks during testing
Acrylic	Material destroys/breaks during testing	Glass	Material destroys/breaks during testing


 **Material Caliper**

Face Stock	.0020"	50.8µ	Liner (kraft/FL)	.0030"	76.2µ
Adhesive	.0008"	20.3µ	Total Material	.0058"	147.3µ


 **Exterior Durability**
Material Only: 2 Years

 **Temperature Range**
Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)


 **Shelf Life**
Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

 **Recommended Ribbons**

Pre-printing UV flexographic inks Thermal Transfer Printing	<ul style="list-style-type: none"> • TTRR-A • TTRR-S • TTRR-B • TTRR-V • TTRR-D
--	--

 **Chemical Resistance**
Chemical Agents Material Only

Oil @ 120°F/72 hours	Material Only (W/o printing) Passed
Water	Passed
Weak Acid	Passed

 **Process Durability**
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866