


# TT733



## Labels for Life.

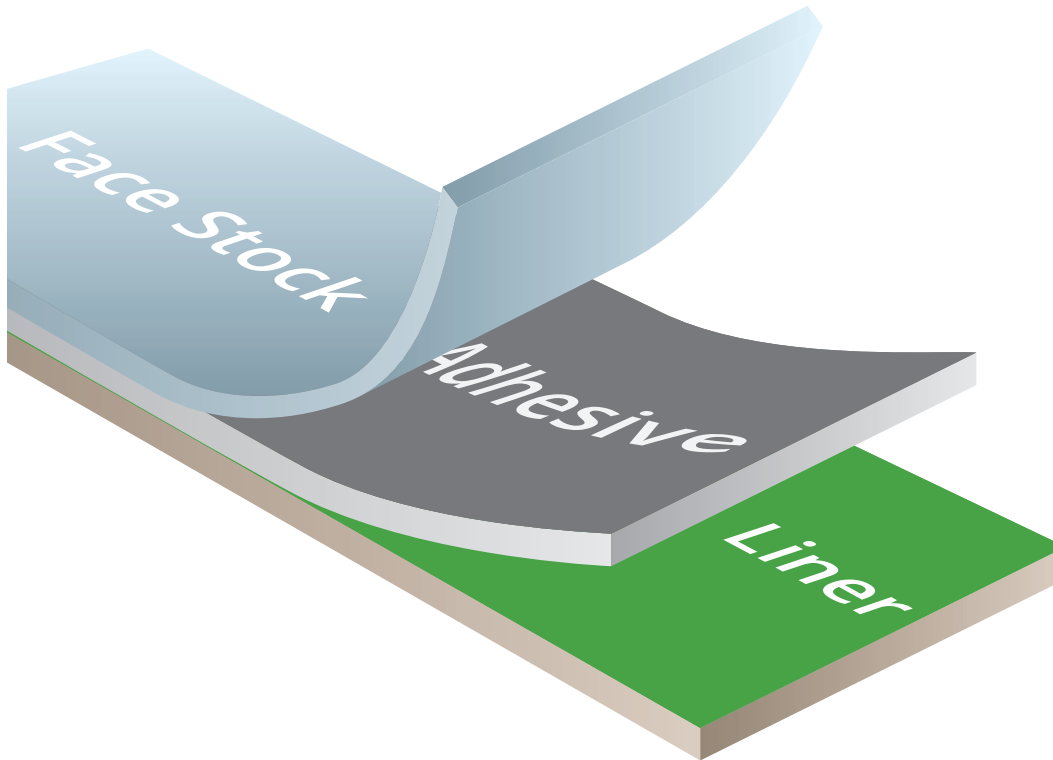

**Face Stock:** 2 mil semi-gloss destructible white vinyl offers excellent resistance to abrasion. The material is designed to be a tamper evident film. UV flexographic and thermal transfer printing.

**Adhesive:** 0.8 mil high performance permanent acrylic adhesive offering excellent conformability to adhere to a wide variety of surfaces due to its universal adhesive.

**Release Liner:** 55# kraft liner designed to offer excellent performance for manual application.

## Thermal Transfer Semi-Gloss White Destructible Vinyl Film

TT733 is designed to destruct in applications where the label is attempted to be removed or is scratched rough and excessively. Key features include: tamper evident, indoor only applications and excellent smudge and abrasion resistance. When used in combination with the recommended IDENTCO UV flexographic inks and thermal transfer ribbons, it will meet the most demanding durable labeling requirements. The material is very conformable and will adhere to a wide variety of surfaces due to its universal adhesive.

## Typical Applications

- Name plates
- Rating Plates
- Industrial Barcodes
- Some Tamper Evident Requirements

## Typical Industry Sectors

- Automotive
- Electronics
- Industrial




[www.identco.com](http://www.identco.com)

# TT733


Thermal Transfer Semi-Gloss  
White Destructible Vinyl Film



Labels for Life.


 **Agency Recognitions**  
UL-MH16873


 **Adhesion**  
Stainless Steel Material destroys/breaks during testing Polypropylene Material destroys/breaks during testing  
Acrylic Material destroys/breaks during testing Glass Material destroys/breaks during testing


 **Material Caliper**


Face Stock	.0020"	50.8μ	Liner (kraft/FL)	.0030"	76.2μ
Adhesive	.0008"	20.3μ	<b>Total Material</b>	<b>.0058"</b>	<b>147.3μ</b>

 **Exterior Durability**  
Material Only: 2 Years


 **Temperature Range**  
Service Temperature: -40°F to 300°F (-40°C to 149°C)  
Minimum Application Temperature: 50°F (10°C)

 **Shelf Life**  
Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.  
Shelf Life: 2 years @ recommended storage

 **Recommended Ribbons**  
Pre-printing UV flexographic inks Thermal Transfer Printing  
• TTRR-A • TTRR-B  
• TTRR-V TTRR-D

 **Chemical Resistance**  
Chemical Agents Material Only

Oil @ 120°F/72 hours	Material Only (W/o printing)
Water	Passed
Weak Acid	Passed

 **Process Durability**  
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

**UNITED STATES HEADQUARTERS**

28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

**MEXICO MONTERREY**

Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

**GERMANY FRANKFURT**

Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

**PRC HONG KONG**

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019

**MALAYSIA PENANG**

Suite 163E, Level 16, Room 1602  
Hunza Tower Gurney Paragon  
Jalan Kelawei, Georgetown  
10250 Penang  
Phone: +6012 466 - 0866