


L213(P)



Labels for Life.

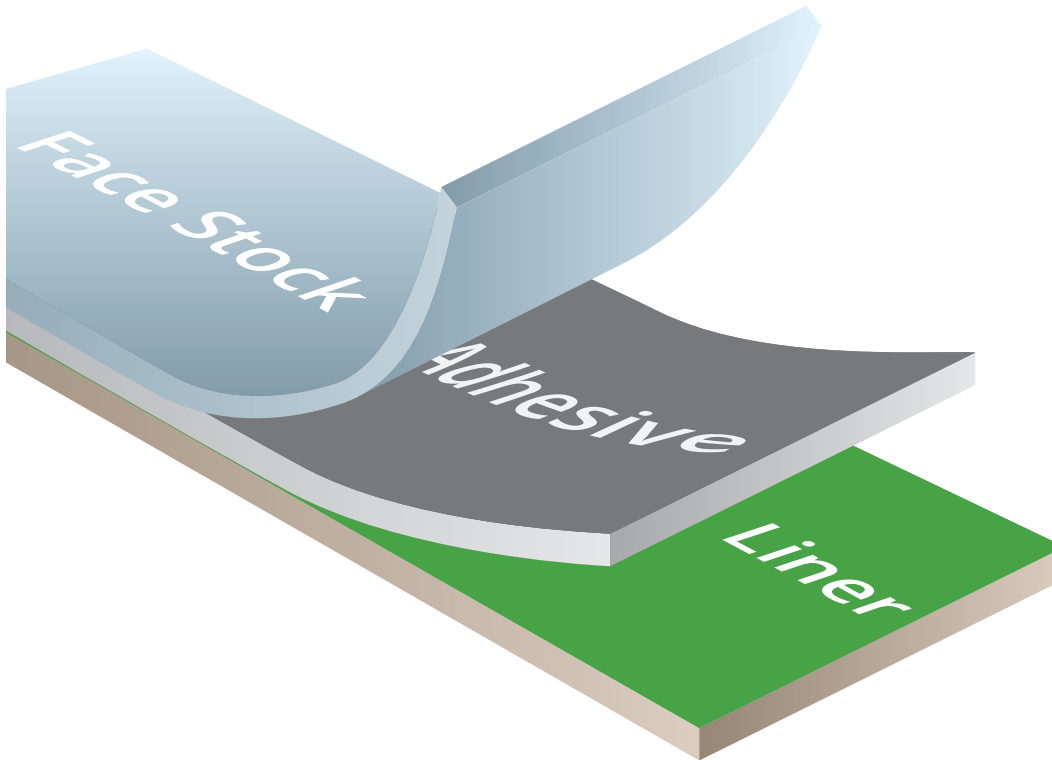

Face Stock: 2 mil topcoated platinum polyester offers excellent resistance to harsh chemicals and abrasion. The material will not shrink and is recommended for thermal transfer printing and flexographic printing.

Adhesive: 0.8 mil high performance permanent pressure sensitive adhesive.

Release Liner: 55# kraft release liner.

Printable Platinum Polyester Film

L213(P) is designed to flexographic printing with the option for thermal transfer printing of variable information. Key features include: high performance adhesive, chrome appearance, ideal for marking nameplates and topside of through hole printed circuit boards, and excellent resistance to solvents and scratching. When used in combination with the recommended IDENTCO inks & ribbons, it meets the most demanding durable labeling requirements.

Typical Applications

- Rating Plates
- Nameplates
- Industrial Barcodes

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com


L213(P)


Printable Platinum Polyester Film



Labels for Life.

Agency Recognitions

| | | | | | | |
|---|-----------------|----------|---------|---------------|----------|---------|
|  | Adhesion | | | | | |
| | Stainless Steel | 67 oz/in | 737 N/m | Polypropylene | 56 oz/in | 616 N/m |
| | Polycarbonate | 61 oz/in | 671 N/m | Glass | 71 oz/in | 781 N/m |

| | | | | | | |
|---|-------------------------|--------|-------|-----------------------|---------------|---------------|
|  | Material Caliper | | | | | |
| | Face Stock | .0020" | 50.8μ | Liner(kraft) | .0032" | 81.3μ |
| | Adhesive | .0008" | 20.3μ | Total Material | .0060" | 152.4μ |

Exterior Durability

Recommended : Indoor use

Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)

Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

Recommended Ribbons

Thermal Transfer Printing
• Resin ribbons

Flexographic Printing
• Flexographic inks

Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866