


# OL1001(P)



## Labels for Life.

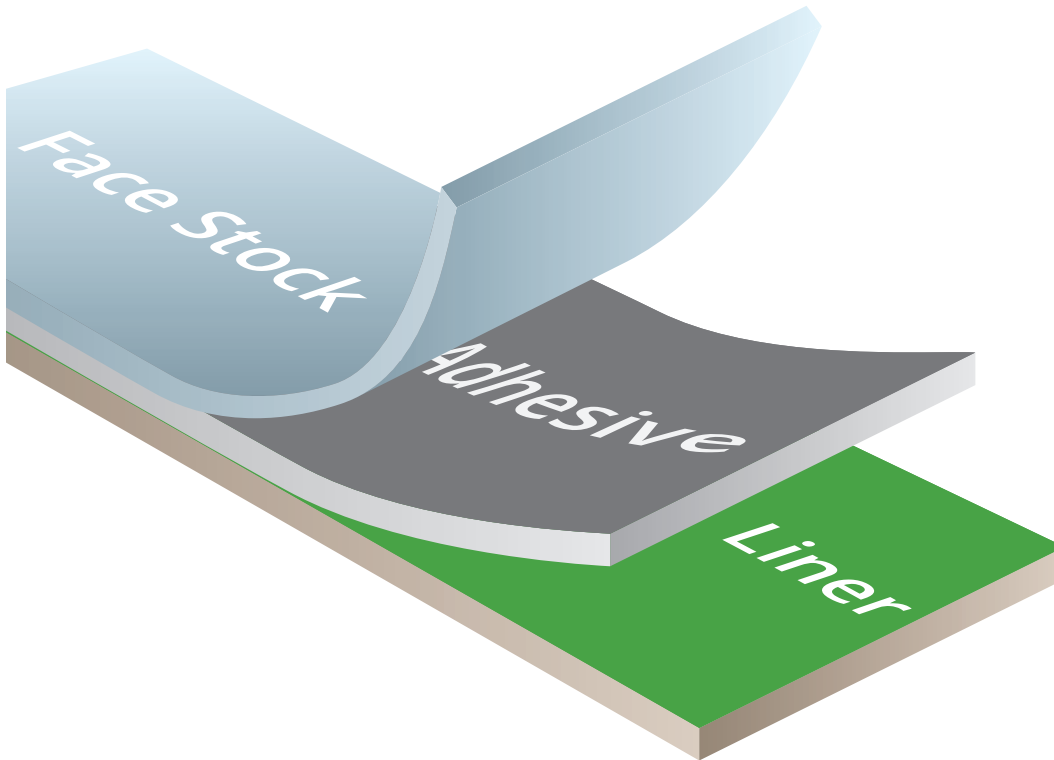

**Face Stock:** 1.0 mil non-printable matte clear polyester overlaminating film offers excellent resistance to scratches and abrasion. This material is designed to not shrink. It cannot be used in a fan fold application.

**Adhesive:** 0.9- 1.0 mil general purpose permanent acrylic adhesive offering excellent scratch and smudge resistance.

**Release Liner:** 1.0 mil polyester liner designed to offer excellent performance.

## Matte Clear Polyester Overlaminating Film

OL1001(P) is designed to be a non-printable matte film. Key features include: indoor only applications, will not shrink, can be used as an overlaminate, and excellent smudge and scratch resistance. When used in combination with the recommended IDENTCO materials, it will meet the most demanding durable labeling requirements.

## Typical Applications

Shipping Labels  
Bags  
Corrugated Cardboard  
Packages

## Typical Industry Sectors

Automotive  
Electronics  
Industrial











[www.identco.com](http://www.identco.com)

# OL1001(P)

Matte Clear Polyester  
Overlaminating Film



Labels for Life.

	<b>Agency Recognitions</b> UL & CSA with TT704(P) & TT734(P)
	<b>Adhesion</b> Stainless Steel 35.0 oz/in 385 N/m Polypropylene 18.5 oz/in 204 N/m Acrylic 45.0 oz/in 495 N/m
	<b>Material Caliper</b> Face Stock .001" 25.4μ Adhesive .0009" / .001" 22.9/25.5μ Liner (polyester) .0010" 25.4μ <b>Total Material</b> .0029" / .003 0" 73.66/76.2μ
	<b>Exterior Durability</b> Recommended: Indoor and outdoor durability
	<b>Temperature Range</b> Service Temperature: -40°F to 300°F (-40°C to 149°C) Minimum Application Temperature: 50°F (10°C)
	<b>Shelf Life</b> Recommended Storage: 45-90°F (7-32°C) 20-75% R.H. Shelf Life: 2 years @ recommended storage
	<b>Recommended Printing</b> Non-printable
	<b>Process Durability</b> It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 3/7/2017.

## UNITED STATES HEADQUARTERS

28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

## MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

## GERMANY FRANKFURT

Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

## PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019

## MALAYSIA PENANG

Suite 163E, Level 16, Room 1602  
Hunza Tower Gurney Paragon  
Jalan Kelawei, Georgetown  
10250 Penang  
Phone: +6012 466 - 0866