


TT704(P)



Labels for Life.

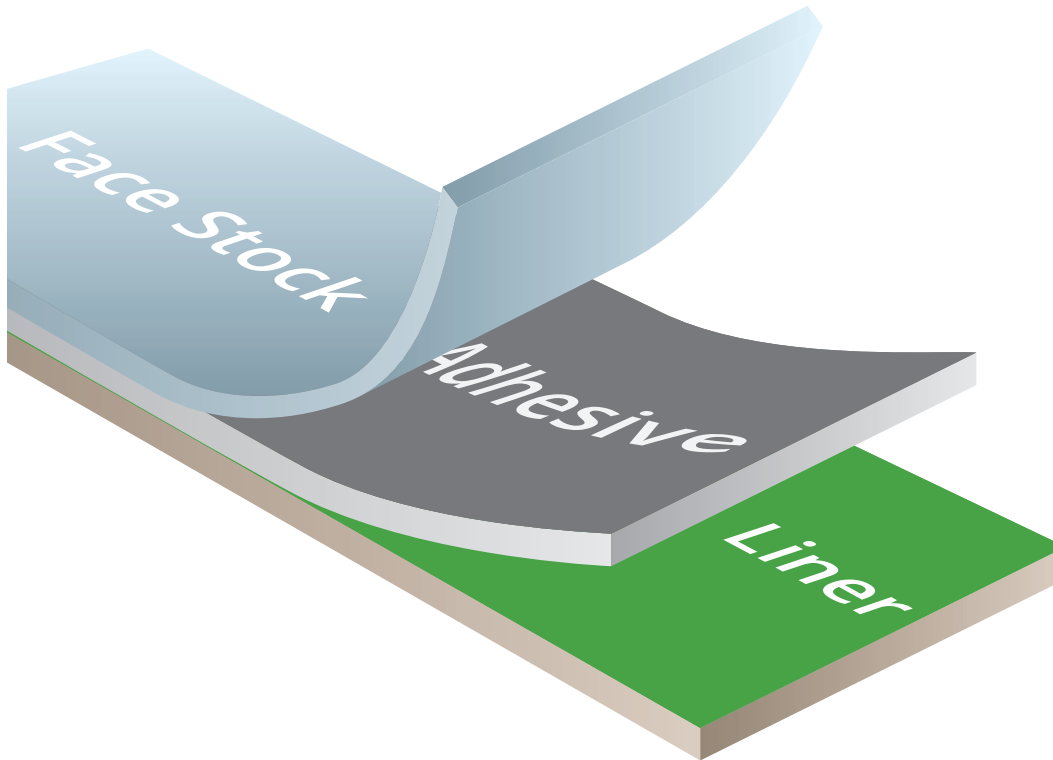

Face Stock: 2 mil topcoated gloss white polyester with excellent resistance to high temperatures, harsh solvents, tearing and abrasion. This material is specifically designed to not shrink.

Adhesive: 0.8-0.9 mil general purpose pressure sensitive acrylic adhesive.

Release Liner: 50# kraft liner that is designed to offer excellent performance for manual application.

Thermal Transfer Gloss White Polyester Film

TT704(P) is designed for on demand thermal transfer printing of variable information. Key features include: indoor and outdoor applications, will not shrink and excellent, heat, tear, smudge, solvent and abrasion resistance. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements. Preheating of the label surface will enhance the performance.

Typical Applications

- Name plates
- Rating Plates
- Serial identification labels
- Industrial Barcodes
- Electronic Components Marking
- Property Identification

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com


TT704(P)


Thermal Transfer Gloss White Polyester Film



Labels for Life.

Agency Recognitions

	Stainless Steel		Polypropylene		Glass	
	68 oz/in	748 N/m	24 oz/in	264 N/m	65 oz/in	715 N/m
	71 oz/in	781 N/m				
	Acrylic		Glass			

	Material Caliper		Liner (kraft/FL)		Total Material	
Face Stock	.0020"	50.8μ	.0031"	78.7μ		
Adhesive	.0008"/.0009"	20.3/22.9μ			.0059/.0060"	149.9/152.4μ

Exterior Durability

Material Only: 2 Years

Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)

Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

Recommended Ribbons

TTRR-B TTRR-S
TTRR-D

Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866