


TT734(P)



Labels for Life.

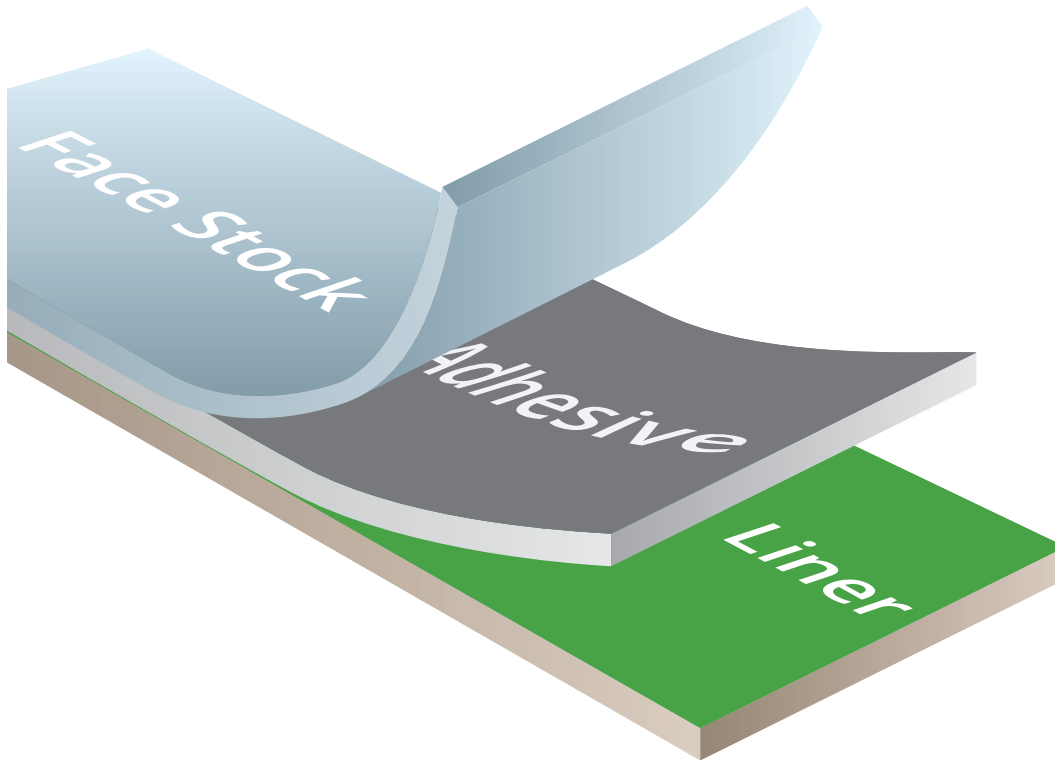

Face Stock: 2 mil topcoated gloss platinum polyester with excellent resistance to smudging. This material is specifically designed to not shrink.

Adhesive: 0.9 mil general purpose pressure sensitive acrylic adhesive.

Release Liner: 50# kraft liner that is designed to offer excellent performance for both manual and automatic application.

Thermal Transfer Gloss Platinum Polyester Film

TT734(P) is designed for on demand thermal transfer printing of variable information. Key features include: indoor and some outdoor applications (specific testing recommended), excellent heat, solvent, tear and abrasion resistance and layered with a removable adhesive. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements.

Typical Applications

- Rating Plates
- Nameplates
- Property Identification
- Industrial Barcodes

Typical Industry Sectors

- Automotive
- Electronics
- Industrial











www.identco.com

TT734(P)

Thermal Transfer Gloss Platinum Polyester Film



Labels for Life.

	Agency Recognitions					
	Adhesion					
	Stainless Steel	68 oz/in	748 N/m	Polypropylene	24 oz/in	264 N/m
	Acrylic	71 oz/in	781 N/m	Glass	65 oz/in	715 N/m
	Material Caliper					
	Face Stock	.0020"	50.8 μ	Liner(kraft)	.0031"	78.7 μ
	Adhesive	.0009"	22.9 μ	Total Material	.0060"	152.4 μ
	Exterior Durability					
	Recommended: 2 years					
	Temperature Range					
	Service Temperature: -40°F to 302°F (-40°C to 150°C)					
	Minimum Application Temperature: 32°F (0°C)					
	Shelf Life					
	Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.					
	Shelf Life: 2 years @ recommended storage					
	Recommended Printing					
	Pre-printing			Thermal Transfer Printing		
	• UV flexographic inks			• TTRR-B • TTRR-D • TTRR-S		
	Process Durability					
	It is recommended that customers test the material in actual application to determine if the material meets all requirements.					

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866