

TT791




Labels for Life.

Face Stock: 1.0 mil clear polyester.

Adhesive: 0.8-0.9 high performance permanent acrylic adhesive.

Release Liner: 44# Natural Polycoated Kraft liner designed to offer excellent performance.

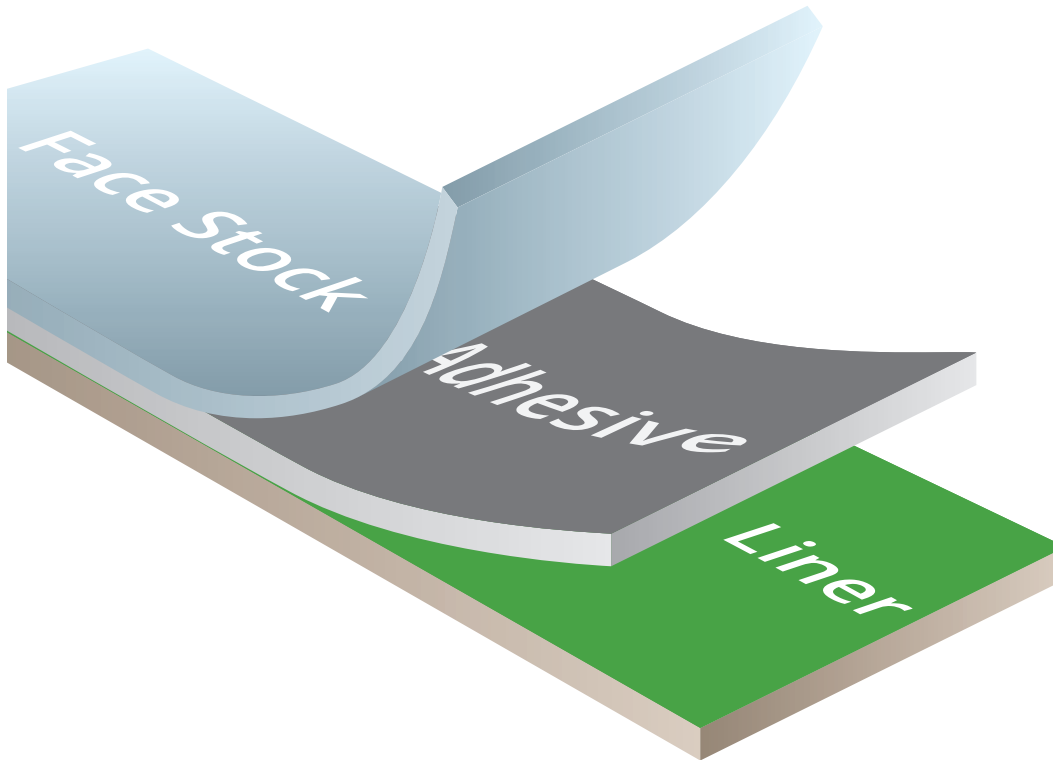

Gloss Clear Polyester

TT791 is a topcoated gloss clear polyester overlaminating film. Key features: indoor and outdoor use, can be thermal transfer printed with variable information, smudge and abrasion resistance, will not shrink, and excellent resistance to solvents and scratching. When used in combination with the recommended IDENTCO materials, it will meet the most demanding durable requirements. This material cannot be used in a fan fold application.

Typical Applications

- Overlaminating Pre-printed
- Finished Products
- Rating Plates
- Nameplates
- Component Marking.

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

TT791

Gloss Clear Polyester



Labels for Life.

Agency Recognitions

UL recognized with:

- TT260, TT310, TT700P, TT710P, TT723, TT724, TT763, TT791

Adhesion

Stainless Steel	41 oz/in	451 N/m
Acrylic	44 oz/in	484 N/m
Glass	39 oz/in	429 N/m

Material Caliper

Face Stock	.0010"	25.4μ	Liner(kraft)	.0030"	76.2μ
Adhesive	.0008/.0009"	20/23μ	Total Material	.0048/.0049"	121.6/124.6μ

Exterior Durability

Recommended: Indoor and 2 year outdoor

Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
 Minimum Application Temperature: 50°F (10°C)

Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
 Shelf Life: 2 years @ recommended storage

Recommended Printing

Flexographic printing
 Thermal transfer resin ribbons

Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

<p>UNITED STATES HEADQUARTERS 28164 W. Concrete Drive Ingleside, IL 60041 Phone: +1 (815) 385 - 0011 Fax +1 (815) 385 - 0359</p>	<p>MEXICO MONTERREY Carr. a Laredo Km. 16.5 Interior 14B, Col. Moisés Sáenz, 66613 Apodaca, Nuevo Leon Phone: +52 (81) 8008 - 0438</p>	<p>GERMANY FRANKFURT Güterbahnhofstrasse 3-7 63450 Hanau Phone: +49 (6181) 440 830 - 0 Fax: +49 (6181) 440 830 - 99</p>	<p>PRC HONG KONG Unit 1708, 17/F, 9 Wing Hong St. Cheung Sha Wan, Kowloon Phone: +852 2959 2156 Fax: +852 2959 2019</p>	<p>MALAYSIA PENANG Suite 163E, Level 16, Room 1602 Hunza Tower Gurney Paragon Jalan Kelawei, Georgetown 10250 Penang Phone: +6012 466 - 0866</p>
---	---	--	--	--