


TA467



Labels for Life.

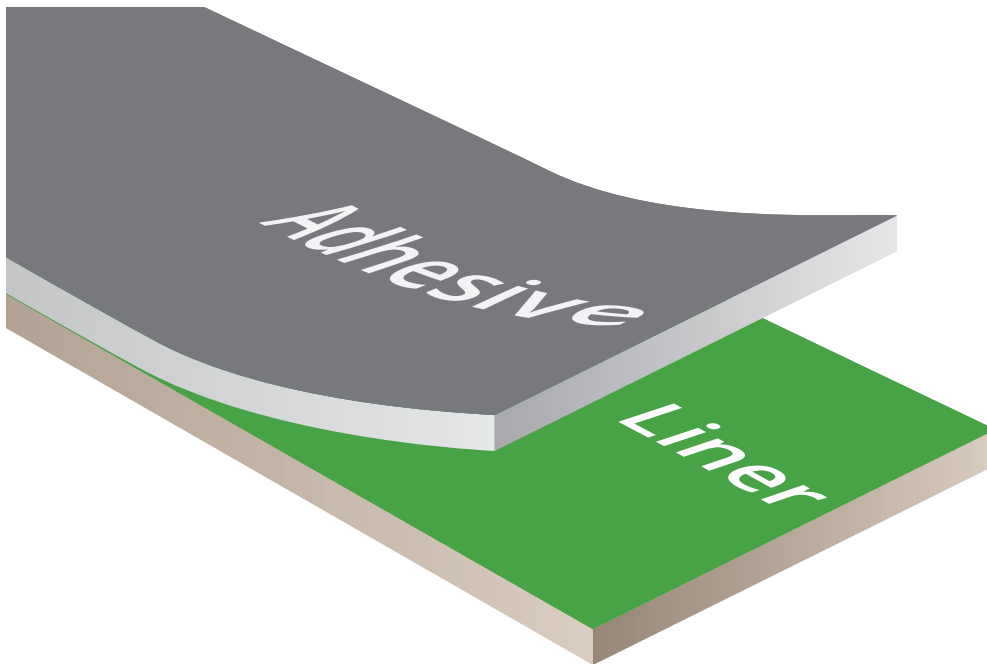

Adhesive: 2.3 mil clear high performance permanent pressure sensitive acrylic that is specifically designed for optimal adhesion and clarity. This material is designed to offer consistent performance even after exposure to humidity and hot/cold cycles.

Release Liner: Available with a 4.2 mil 58# polycoated kraft.

Clear Transfer Adhesive Tape

TA467 is a permanent pressure sensitive adhesive that is specifically designed to offer high bond strength. Key features include: high shear strength, high temperature, harsh environment resistance, and extremely high clarity. When used in combination with the recommended IDENTCO material, it will meet the most demanding durable labeling requirements.

Typical Applications

- Graphic overlays
- Membrane switches
- Durable applications

Typical Industry Sectors

- Automotive
- Electronics
- Industrial









www.identco.com

TA467

Clear Transfer Adhesive Tape



Labels for Life.

	Agency Recognitions UL-MH16225 (PGDQ2) in combination with certain Identco polycarbonate film									
	Adhesion 72 hour RT Stainless Steel 82 oz/in 902 N/m ABS 62 oz/in 682 N/m Acrylic 61 oz/in 671 N/m Aluminum 77 oz/in 847 N/m									
	Material Caliper <table><tr><td>Adhesive</td><td>.0023"</td><td>58.42μ</td></tr><tr><td>Liner</td><td>.0042"</td><td>106.68μ</td></tr><tr><td>Total Material</td><td>.0065"</td><td>165.10μ</td></tr></table>	Adhesive	.0023"	58.42μ	Liner	.0042"	106.68μ	Total Material	.0065"	165.10μ
Adhesive	.0023"	58.42μ								
Liner	.0042"	106.68μ								
Total Material	.0065"	165.10μ								
	Shelf Life Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H. Shelf Life: 2 years @ recommended storage									
	Temperature Range Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C) Minimum Application Temperature: 50 °F (10 °C) <ul style="list-style-type: none">• Short term (minutes/hours) 400 °F (204 °C)• Long term (days/weeks) 300 °F (140 °C)									
	Exterior Durability Testing is recommended in actual application.									
	Process Durability It is recommended that customers test this material in actual application to determine if the material meets all requirements.									

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/11/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866