


TA8132LE



Labels for Life.

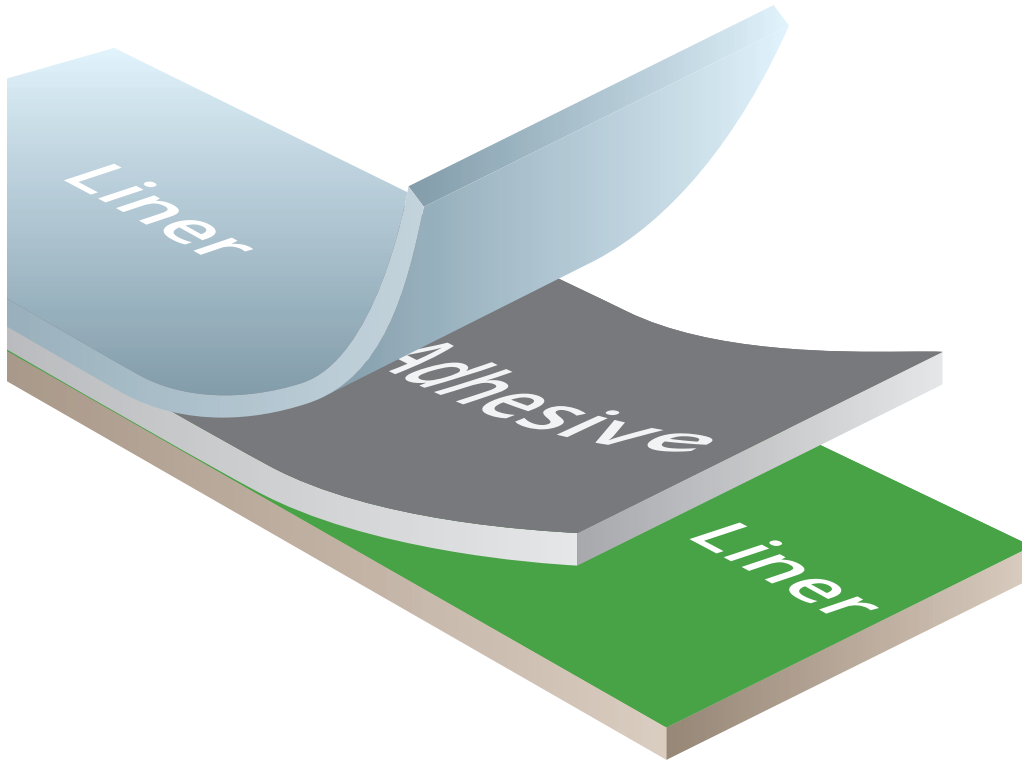

Release Liner: 4.0 mil 58# polycoated kraft liner.

Adhesive: 2.3 mil clear high performance permanent pressure sensitive acrylic that is specifically designed for optimal adhesion. Excellent choice for LSE substrates.

Release Liner: Available with a 6.2 mil 83# polycoated kraft liner for adhesive cut-outs or adhesive only parts.

Clear Transfer Adhesive Tape

TA8132LE is a permanent pressure sensitive adhesive that is specifically designed to offer high bond strength. Key features include: LSE applications, high strength adhesive, high temperature and harsh environment resistance, and extremely high clarity. When used in combination with the recommended IDENTCO material, it will meet the most demanding durable labeling requirements. Adhesion works well with lightly oiled surfaces typical of machine parts.

Typical Applications

- Graphic overlays
- Membrane switches
- Parts requiring selective adhesive areas.

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

TA8132LE

Clear Transfer Adhesive Tape



Labels for Life.

	Agency Recognitions RoHS Directive Compliant 2002/95/EC																	
	Adhesion Stainless Steel 15 Min @ RT 71 oz/in 781 N/m 72 hour @ RT 75 oz/in 825 N/m																	
	Material Caliper <table border="1"> <tr> <td>Liner</td> <td>.0040"</td> <td>101.6μ</td> <td>Liner</td> <td>.0062"</td> <td>157.5μ</td> </tr> <tr> <td>Adhesive</td> <td>.0023"</td> <td>58.4μ</td> <td>Total Material</td> <td>.0125"</td> <td>317.5μ</td> </tr> </table>						Liner	.0040"	101.6μ	Liner	.0062"	157.5μ	Adhesive	.0023"	58.4μ	Total Material	.0125"	317.5μ
Liner	.0040"	101.6μ	Liner	.0062"	157.5μ													
Adhesive	.0023"	58.4μ	Total Material	.0125"	317.5μ													
	Shelf Life Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H. Shelf Life: 2 years @ recommended storage																	
	Temperature Range Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C) Minimum Application Temperature: 50 °F (10 °C) <ul style="list-style-type: none"> • Short term (minutes/hours) 400 °F (204 °C) • Long term (days/weeks) 300 °F (140 °C) 																	
	Exterior Durability Recommended: Indoor and outdoor use • Outdoor use performance depends on the substrate.																	
	Process Durability It is recommended that customers test this material in actual application to determine if the material meets all requirements.																	

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/18/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
 Ingleside, IL 60041
 Phone: +1 (815) 385 - 0011
 Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
 14B, Col. Moisés Sáenz, 66613
 Apodaca, Nuevo Leon
 Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
 63450 Hanau
 Phone: +49 (6181) 440 830 - 0
 Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
 Cheung Sha Wan, Kowloon
 Phone: +852 2959 2156
 Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
 Hunza Tower Gurney Paragon
 Jalan Kelawai, Georgetown
 10250 Penang
 Phone: +6012 466 - 0866