


TT711



Labels for Life.

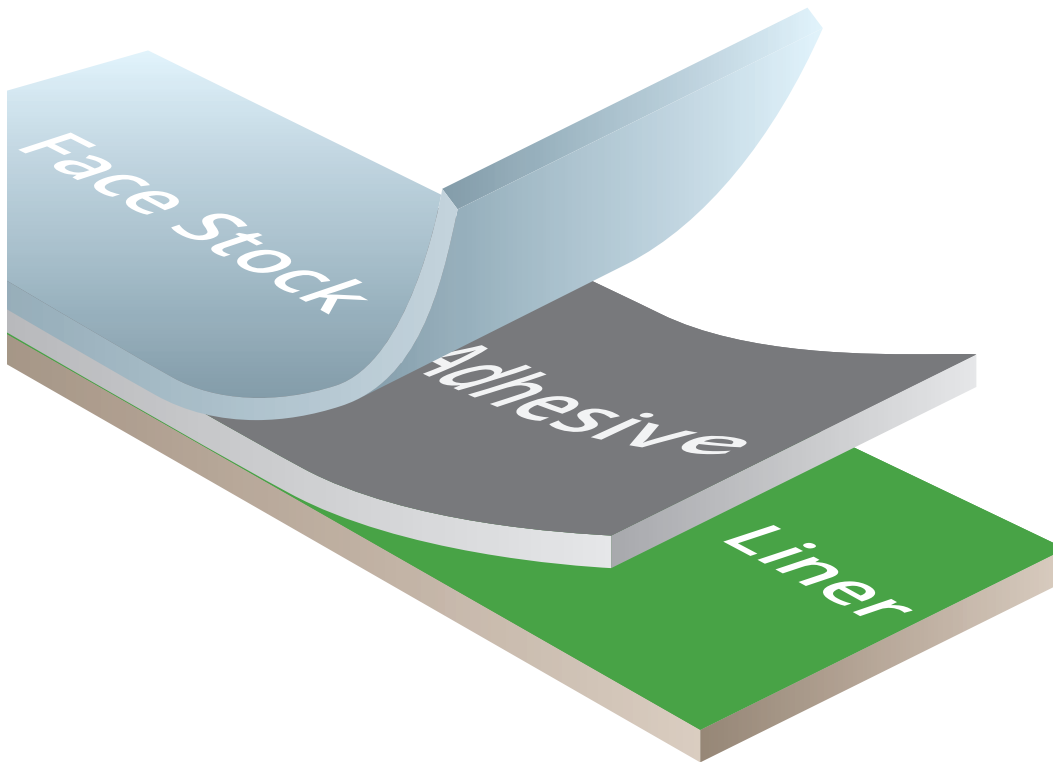

Face Stock: 2.0 mil topcoated gloss white polyester offers excellent resistance to chemicals, smudges and abrasion. The material is specifically designed to be a tamper indicating product and is ideal for marking the topside of through-hole printed circuit boards.

Adhesive: 0.8-0.9 mil high performance permanent acrylic adhesive offering excellent chemical and abrasion resistance. Specifically designed leave a triangle void in adhesive when peeled.

Release Liner: 50# kraft liner designed to offer excellent performance.

Thermal Transfer Gloss White "VOID" Polyester Film

TT711 is designed for on demand thermal transfer printing of variable information. Key features include: tamper evident, indoor and outdoor applications and excellent smudge, solvent and abrasion resistance. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements. The material is designed to be a tamper evident label leaving a triangle void when removed.

Typical Applications

- Name plates
- Rating Plates
- Serial identification labels
- Industrial Barcodes
- Serial identification
- Tamper evident applications.

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

TT711

Thermal Transfer Gloss White
"VOID" Polyester Film



Labels for Life.



Agency Recognitions

100% RoHS Compliant



Adhesion

Product cannot be tested to any of the standard adhesive peel tests, due to the fact that the adhesive

seperates from the polyester leaving the word "VOID" making it impossible to take any readings.



Material Caliper

Face Stock	.0020"	50.8μ
Adhesive	.0008"/.0009"	20.3/22.9μ

Liner(kraft)	.0031"	77.8μ
Total Material	.0059"/.0060"	149.9/152.4μ



Exterior Durability

Material only: 2 years
Material w/TTRR-D ribbon: 2 years



Temperature Range

Service Temperature: -29°F to 240°F (-33°C to 115°C)
Minimum Application Temperature: 50°F (10°C)



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage



Recommended Ribbons

TTRR-D
TTRR-C
TTRR-S



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 7/19/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866