


TT713



Labels for Life.

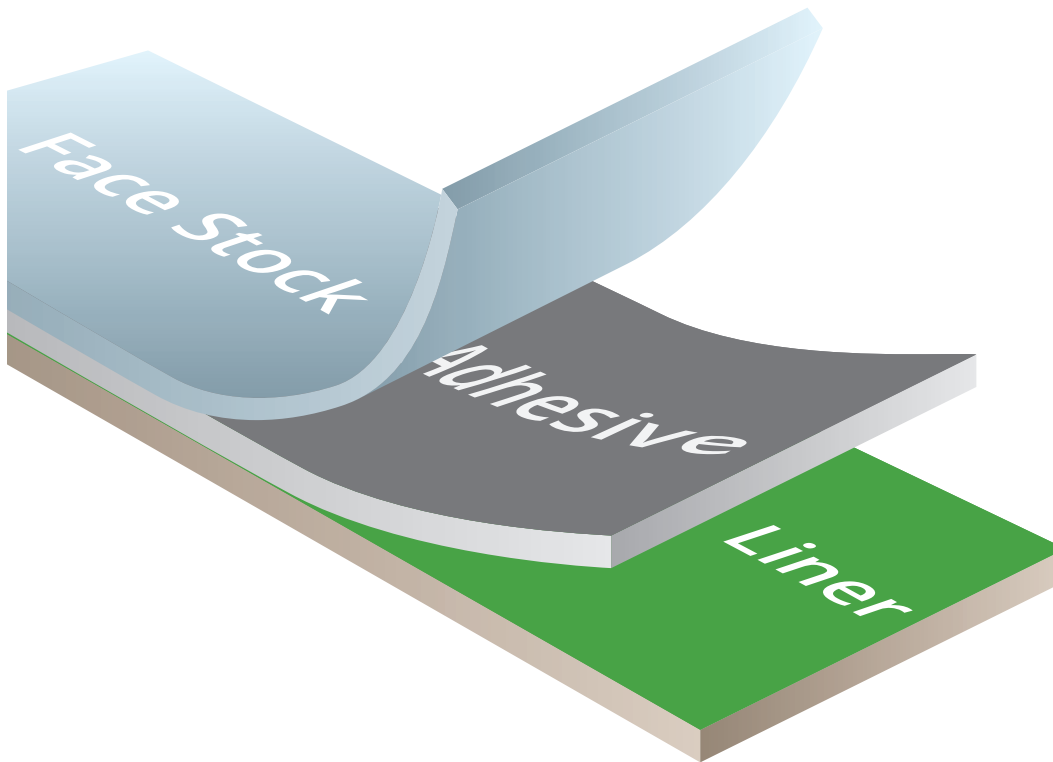

Face Stock: 2.4 mil matte silver topcoated thermal transfer printable tamper evident polyester film.

Adhesive: 0.8 - 0.9 mil high performance permanent pressure sensitive acrylic adhesive.

Release Liner: 3.1 mil semi-bleached kraft release liner that has been coated to prevent label pick-off.

Tamper Evident Checkerboard Matte Silver Polyester Film

TT713 is designed for on-demand thermal transfer printing of variable information. Key features include: indoor and outdoor applications, tamper evident, and will not shrink. When used in combination with the recommended IDENTCO thermal transfer ribbon, it will meet the most durable product identification labeling requirements.

Typical Applications

Tamper evident applications

Typical Industry Sectors

Automotive
Electronics
Industrial



www.identco.com

TT713

Tamper Evident Checkerboard
Matte Silver Polyester Film



Labels for Life.



Agency Recognitions



Adhesion

Product cannot be tested to any of the standard adhesive peel tests, due to the fact that the adhesive

separates from the polyester leaving the word "VOID" making it impossible to take any readings.



Material Caliper

Face Stock	.0024"	61µ
Adhesive	.0008/.0009"	20/23µ

Liner(natural kraft)	.0031"	79µ
Total Material	.0063/.0064"	160.0/162.6µ



Exterior Durability

Recommended: Indoor and 2 year outdoor

- Film: 2 years outdoor
- Matte Coating: may turn yellow under sunlight



Temperature Range

Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)
Minimum Application Temperature: 50 °F (10 °C)



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage



Recommended Printing

Thermal Transfer Printing
• Resin and wax/resin ribbons



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 7/20/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866