


TT730P



Labels for Life.

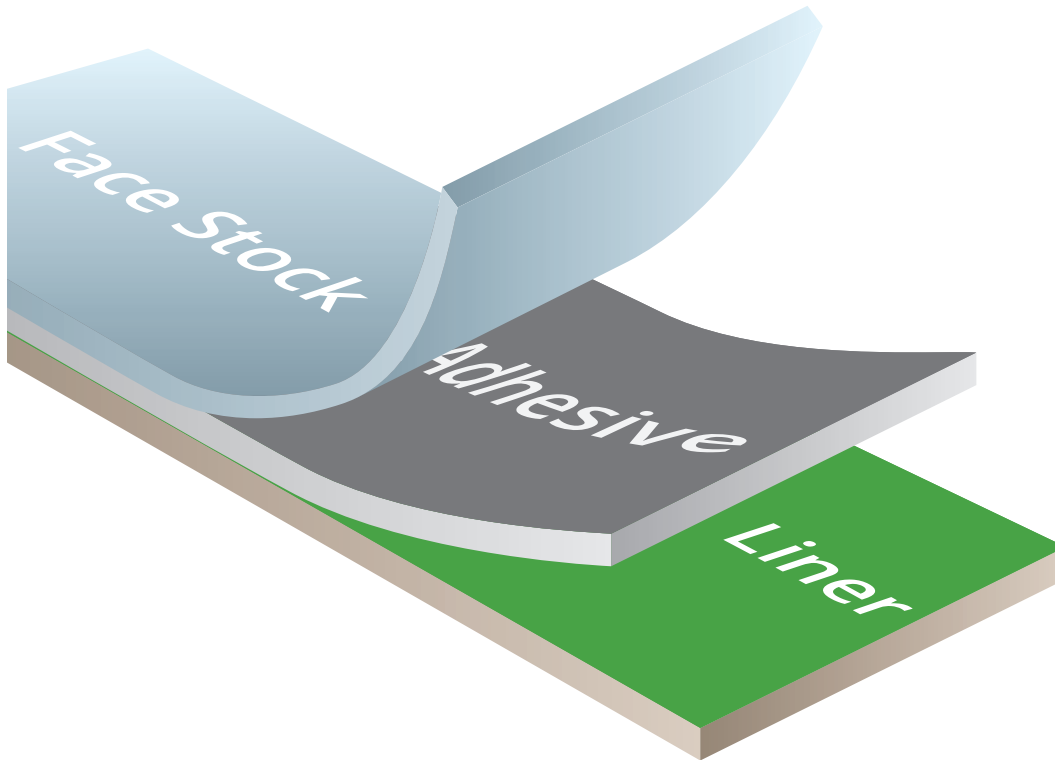

Face Stock: 2 mil topcoated gloss platinum polyester offers excellent resistance to chemicals, smudges and abrasion. The material is specifically designed for marking electronic components and the topside of through-hole printed circuit boards. Can be thermal transfer or UV flexographic printed.

Adhesive: 0.9 mil high performance permanent acrylic adhesive offering excellent chemical and abrasion resistance.

Release Liner: 50# kraft liner designed to offer excellent performance for manual application.

Thermal Transfer Gloss Platinum Polyester Film

TT730P is designed for on demand thermal transfer printing of variable information. Key features include: indoor and outdoor applications, will not shrink and excellent smudge, solvent and abrasion resistance. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements. Preheating of the label surface will enhance the performance. Can be thermal transfer or UV flexographic printed.

Typical Applications

- Nameplates
- Rating Plates
- Serial Identification Labels
- Industrial Barcodes
- Electronic Components

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com


TT730P

Thermal Transfer Gloss Platinum Polyester Film



Labels for Life.

 **Agency Recognitions**
UL-MH16873/ MH16225


 **Adhesion**


Stainless Steel	55 oz/in	605 N/m	Polypropylene	12 oz/in	132 N/m
Acrylic	68 oz/in	748 N/m	Glass	56 oz/in	616 N/m
			Polycarbonate	58 oz/in	638 N/m


 **Material Caliper**


Face Stock	.0020"	50.8μ	Liner(kraft)	.0031"	78.7μ
Adhesive	.0009"	22.9μ	Total Material	.0060"	152.4μ

 **Exterior Durability**
Material Only: 2 Years
Material w/ TTRR-D Ribbon: 2 Years

 **Temperature Range**
Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)

 **Shelf Life**
Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

 **Recommended Ribbons**
TTRR-B
TTRR-D
TTRR-S

 **Process Durability**
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 7/24/2017.

UNITED STATES HEADQUARTERS
28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY
Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT
Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG
Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG
Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866