


TT704/L194



Labels for Life.

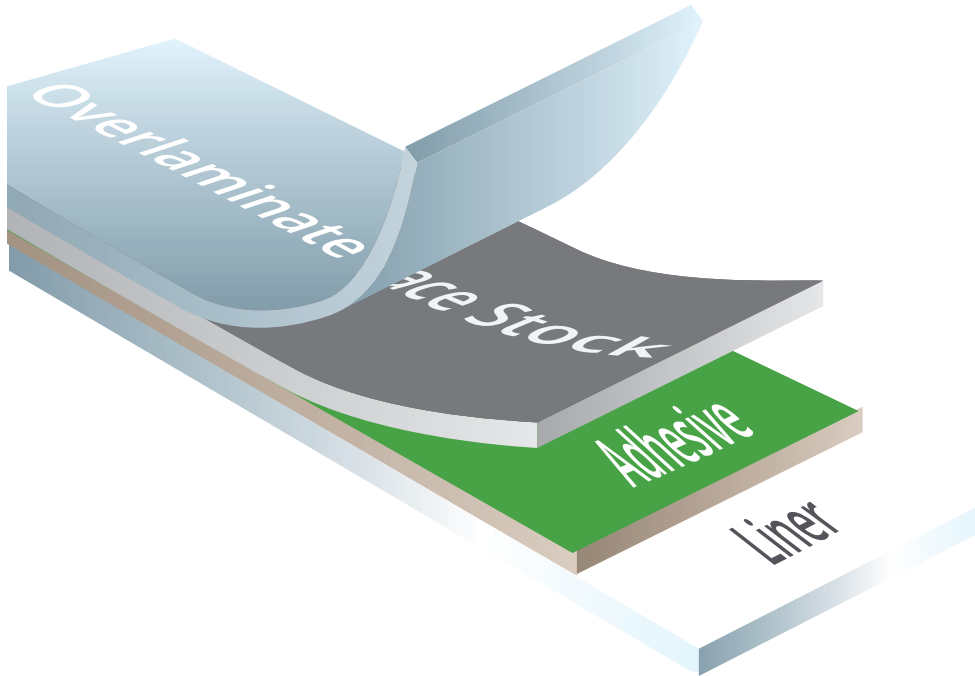

Overlaminates: 2.2 mil matte clear polyester overlaminates. Designed for UV flexographic and thermal transfer printing.

Face Stock: 2 mil gloss white high performance polyester.

Adhesive: 0.8 mil high performance emulsion acrylic adhesive offering excellent chemical and abrasion resistance.

Release Liner: 3.2 mil (50# kraft) release liner that offers excellent performance for manual application.

Matte White Composite Film

TT704/L194 is designed for flexographic printing with the option of on demand thermal transfer printing of variable information. Key features include: indoor and 2-year outdoor applications, excellent abrasion, solvent, smudge, and heat resistance, and it will not shrink. When used in combination with the recommended IDENTCO inks and ribbons it will meet the most demanding durable labeling requirements.

Typical Applications

- Name plates
- Rating Plates
- Serial identification labels
- Industrial Barcodes
- Electronic Components Marking
- Property Identification

Typical Industry Sectors

- Automotive
- Electronics
- Aerospace











www.identco.com

TT704/L194

Matte White Composite Film



Labels for Life.

	Agency Recognitions Pending																	
	Adhesion Stainless 44 oz/in 484 N/m																	
	Material Caliper <table><tr><td>Overlamine</td><td>.0022"</td><td>55.9μ</td><td></td><td></td></tr><tr><td>Face Stock</td><td>.0020"</td><td>50.8μ</td><td>Liner</td><td>.0032"</td><td>81.3μ</td></tr><tr><td>Adhesive</td><td>.0008"</td><td>20.3μ</td><td>Total Material</td><td>.0082"</td><td>208.3μ</td></tr></table>	Overlamine	.0022"	55.9μ			Face Stock	.0020"	50.8μ	Liner	.0032"	81.3μ	Adhesive	.0008"	20.3μ	Total Material	.0082"	208.3μ
Overlamine	.0022"	55.9μ																
Face Stock	.0020"	50.8μ	Liner	.0032"	81.3μ													
Adhesive	.0008"	20.3μ	Total Material	.0082"	208.3μ													
	Exterior Durability Recommended: Indoor and outdoor applications • Outdoor: 2 year • Outdoor testing recommended in actual application																	
	Temperature Range Service Temperature: -40°F to 300°F (-40°C to 149°C) Minimum Application Temperature: 32°F (0°C)																	
	Shelf Life Recommended Storage: 45-90°F (7-32°C) 20-75% R.H. Shelf Life: 2 years @ recommended storage																	
	Recommended Printing UV Flexographic Printing Thermal Transfer Printing • TTRR-B, TTRR-D, TTRR-CR, TTRR-S																	
	Process Durability It is recommended that customers test the material in actual application to determine if the material meets all requirements.																	

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 7/27/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866