


CP1150



Labels for Life.

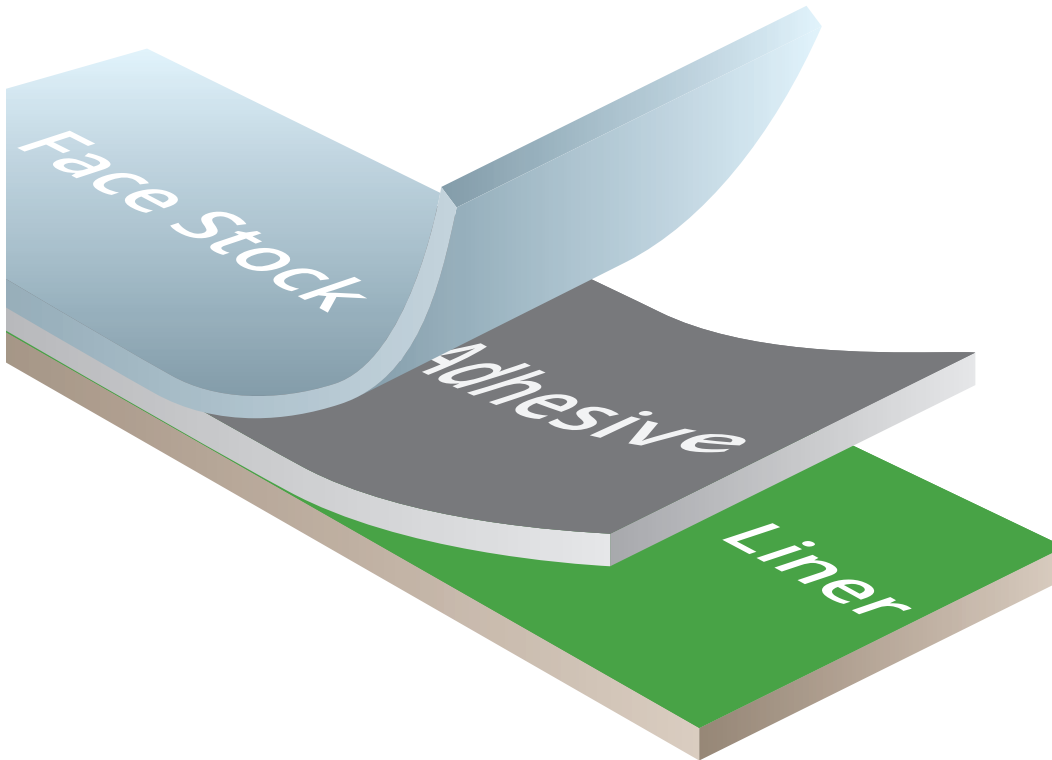

Face Stock: 3 mil semi-gloss white litho-grade, ground-wood free paper. It provides excellent dimensional stability.

Adhesive: 0.5 mil water-based ultra-removable adhesive, featuring clean long-term removability from most smooth surfaces.

Release Liner: 40# supercalendered bleached kraft release liner designed for excellent diecutting due to its high internal strength and tear resistance.

Semi-Gloss White Paper

CP1150 is designed for UV flexographic printing with the option of thermal transfer printing of variable information. Key features include: indoor only applications, removability, ultra-smooth topcoat, and smudge and scratch resistance. When used in combination with the recommended IDENTCO inks or ribbons, it will meet the most demanding durable labeling applications. This material is ideal for marking packages, corrugated cardboard, shipping labels and for printing barcodes on the ultra smooth topcoat.

Typical Applications

- Corrugated cardboard
- Shipping labels
- Product Identification

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

CP1150

Semi-Gloss White Paper



Labels for Life.



Adhesion

Stainless Steel 6 oz/in 65.6 N/m



Material Caliper

Face Stock	.0030"	76.2μ	Liner(kraft)	.0025"	63.5μ
Adhesive	.0005"	12.7μ	Total Material	.0064"	162.6μ



Exterior Durability

Recommended: Indoor use only.



Temperature Range

Service Temperature: -20 °F to 250 °F (-29 °C to 121 °C)
Minimum Application Temperature: 20 °F (-7 °C) Short
Term Temp Test: -110 °C for 10 days



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.
Shelf Life: 1 years @ recommended storage



Recommended Printing

Pre-Printing
• Flexographic printing

Thermal Transfer Printing
• TTR • TTRR-A



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866