

CP2003




Labels for Life.

Face Stock: 2.0 mil gloss clear polypropylene film.

Adhesive: 0.7 mil ultra removable acrylic adhesive designed for high initial tack with clean removability when needed.

Release Liner: 1.5 mil clear polyester release liner.

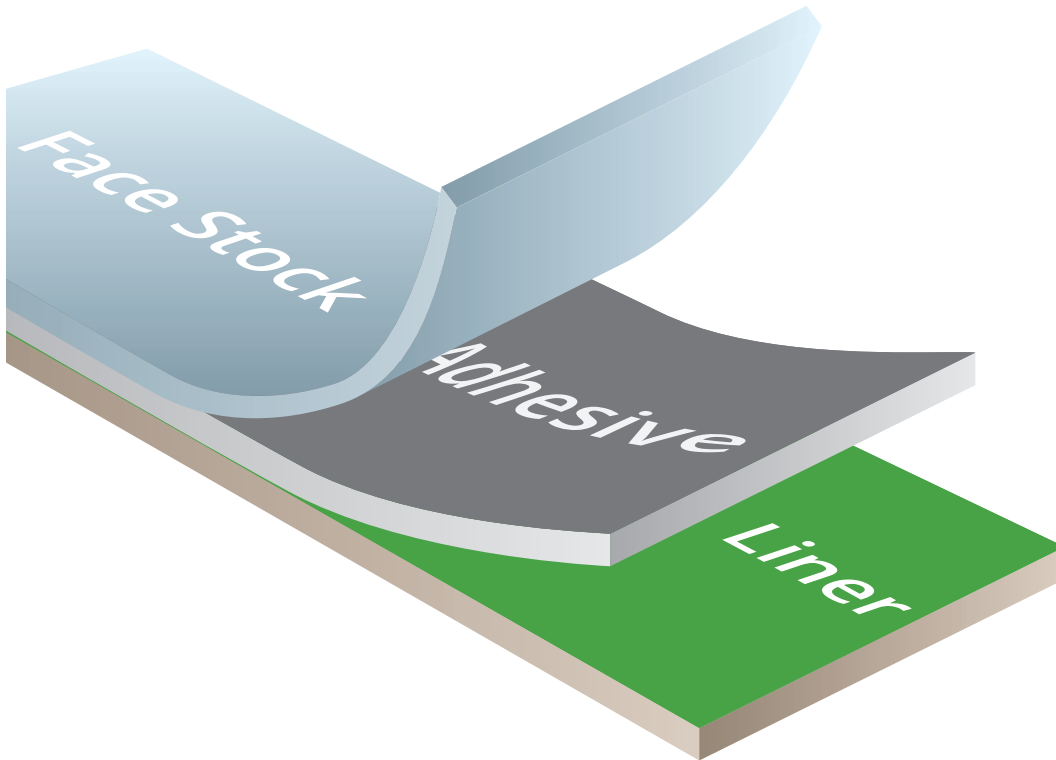

Removable Clear Polypropylene Film

CP2003 is specifically designed for on-demand thermal transfer printing of variable information. Key features include excellent smudge and scratch resistance, indoor use only, removable adhesive, and is ideal for consumer electronics. When used in combination with the recommended IDENTCO inks or ribbons, it will meet the most demanding durable labeling applications.

Typical Applications

Electronic devices such as: computers, GPS units, cell phones, and any other applications requiring clean removability of the label.

Typical Industry Sectors

Automotive
Electronics
Industrial











www.identco.com

CP2003

Removable Clear Polypropylene Film



Labels for Life.

	Agency Recognitions RoHS Directive Compliant 2002/95/EC												
	Adhesion Stainless Steel 25.6 oz/in 281.6 N/m												
	Material Caliper <table border="1"><tr><td>Face Stock</td><td>.0020"</td><td>50.8μ</td><td>Liner(polyester)</td><td>.0015"</td><td>38.1μ</td></tr><tr><td>Adhesive</td><td>.0007"</td><td>17.8μ</td><td>Total Material</td><td>.0042"</td><td>106.7μ</td></tr></table>	Face Stock	.0020"	50.8μ	Liner(polyester)	.0015"	38.1μ	Adhesive	.0007"	17.8μ	Total Material	.0042"	106.7μ
Face Stock	.0020"	50.8μ	Liner(polyester)	.0015"	38.1μ								
Adhesive	.0007"	17.8μ	Total Material	.0042"	106.7μ								
	Exterior Durability Recommended: Indoor use only. Testing is recommended in actual application.												
	Temperature Range Service Temperature: -40 °F to 175 °F (-40 °C to 79 °C) Minimum Application Temperature: 50 °F (10 °C)												
	Shelf Life Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H. Shelf Life: 2 years @ recommended storage												
	Recommended Printing Thermal Transfer Printing • TTRR Series Resin Ribbons												
	Process Durability It is recommended that customers test the material in actual application to determine if the material meets all requirements.												

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 1/31/18.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866