

CP2007/TA467




Labels for Life.

Face Stock: 3 mil gloss clear polyester film

Adhesive: 2.3 mil clear high-performance pressure sensitive acrylic that is specifically designed for optimal adhesion and clarity. This material is designed to offer consistent performance even after exposure to humidity and hot/cold cycles.

Release Liner: Available with a 4.2 mil 58# polycoated kraft.

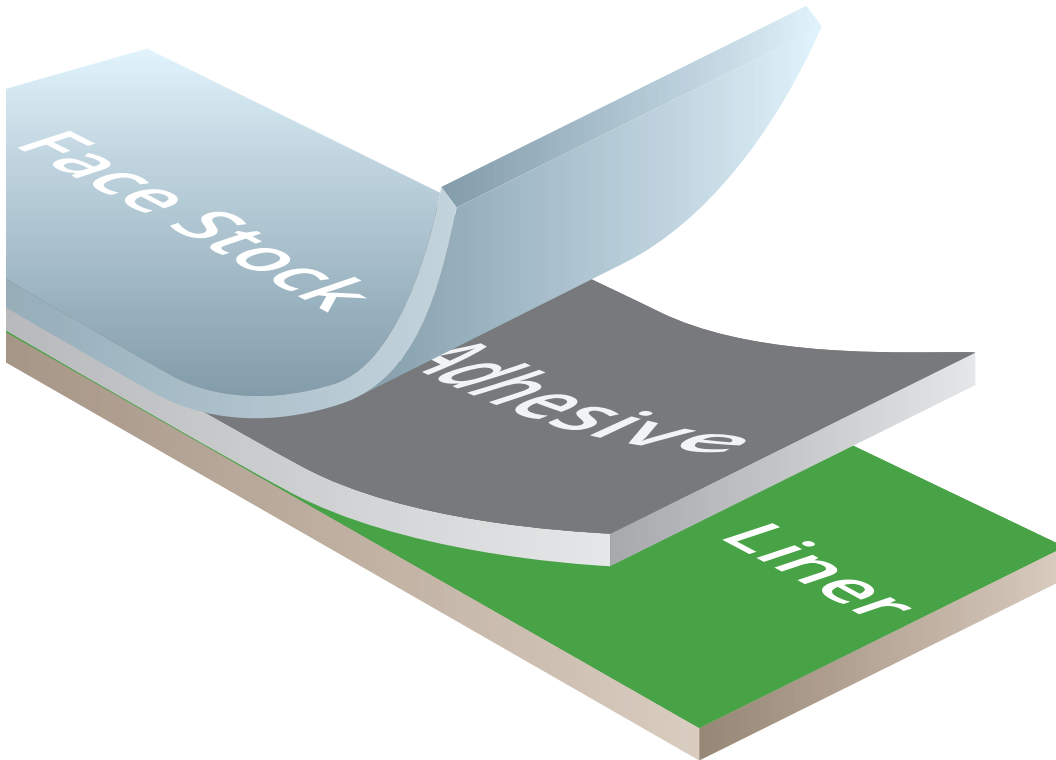

Gloss Clear Polyester Film

CP2007/TA467 is a two part material construction that includes a polyester film that is specifically design to be UV flexographic subsurface printed and a transfer adhesive that offers high bond strength. Key features include a shrink free label that exhibits excellent solvent, abrasion and scuff resistance, high shear strength, high temperature and harsh environment resistance and extremely high clarity. When this construction is used in combination with the recommended IDENTCO inks, it will meet the most demanding durable label applications.

Typical Applications

- Graphic overlays
- Membrane switches

Typical Industry Sectors

- Automotive
- Electronics
- Industrial




www.identco.com


CP2007/TA467

Gloss Clear Polyester Film




Labels for Life.


 **Agency Recognitions**
RoHS Directive Compliant 2002/95/EC

 **Adhesion (3M 467 only)**


Stainless steel	82 oz/in	902 N/m	ABS	62 oz/in	682 N/m
Acrylic	61 oz/in	671 N/m	Aluminum	77 oz/in	847 N/m

 **Material Caliper**


Face Stock	.0030"	76.2μ	Liner(kraft 58#)	.0042"	106.68μ
Adhesive	.0023"	58.42μ	Total Material	.0095"	241.3μ


 **Exterior Durability**
Recommended: Indoor and outdoor use.


- Outdoor use performance depends on the substrate.

 **Temperature Range**
Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)
Minimum Application Temperature: 50 °F (-10 °C)

- Short term (minutes/hours) 400 °F (204 °C)
- Long term (days/weeks) 300 °F (140 °C)

 **Shelf Life**
Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

 **Recommended Printing**
Flexo Printed
No variable printing

 **Process Durability**
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawai, Georgetown
10250 Penang
Phone: +6012 466 - 0866