


CP4150



Labels for Life.

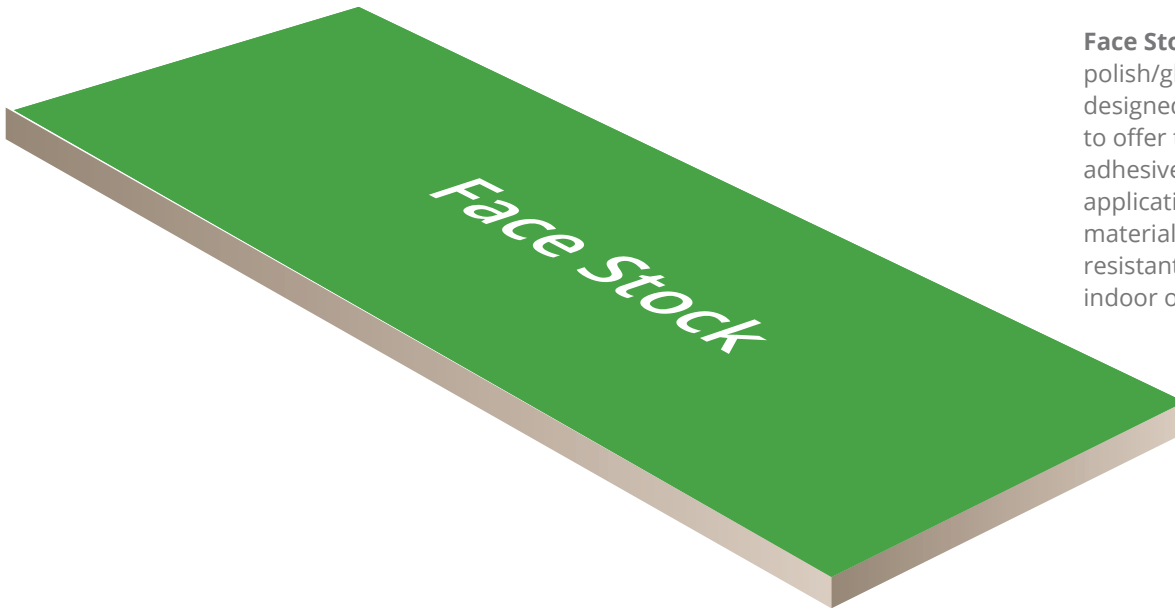

Face Stock: 15 mil clear polish/glossy polycarbonate is designed with no adhesive to offer the use of various adhesives depending on the application requirements. The material is scratch and solvent resistant and can be used in indoor or outdoor applications.

Clear Polish/Glossy Polycarbonate Film

CP4150 is specifically designed with no adhesive to allow for various adhesives based on the requirements of the application. Key features include: indoor applications, glossy textured surface, UV properties and excellent solvent and scratch resistance. When used in combination with the recommended IDENTCO adhesives, it will meet the most demanding durable labeling applications.

Typical Applications

Nameplates and membrane or standard overlays requiring sub-surface printing

Typical Industry Sectors

Automotive
Electronics
Industrial











www.identco.com

CP4150

Clear Clear Polish Polycarbonate Film



Labels for Life.

	Recognitions/Compliance RoHS Directive Compliant 2002/95/EC						
	Adhesion No Adhesive						
	Material Caliper <table><tr><td>Face Stock</td><td>.015"</td><td>381μ</td></tr><tr><td>Total Material</td><td>.015"</td><td>381μ</td></tr></table>	Face Stock	.015"	381μ	Total Material	.015"	381μ
Face Stock	.015"	381μ					
Total Material	.015"	381μ					
	Exterior Durability Indoor						
	Temperature Range <table><tr><td>Heat deflection temperature 290oF (143oC)</td><td>Vicate softening temperature 320oF (160oC)</td></tr><tr><td>Shrinkage temperature 302oF (150oC)</td><td>Brittleness temperature -211oF (-135oC)</td></tr></table>	Heat deflection temperature 290oF (143oC)	Vicate softening temperature 320oF (160oC)	Shrinkage temperature 302oF (150oC)	Brittleness temperature -211oF (-135oC)		
Heat deflection temperature 290oF (143oC)	Vicate softening temperature 320oF (160oC)						
Shrinkage temperature 302oF (150oC)	Brittleness temperature -211oF (-135oC)						
	Shelf Life Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H. Shelf Life: 2 years @ recommended storage						
	Recommended Inks Screen printed						
	Process Durability It is recommended that customers test this material in actual application to determine if the material meets all requirements.						

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 02/17/2017

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866