


OL1000



Labels for Life.

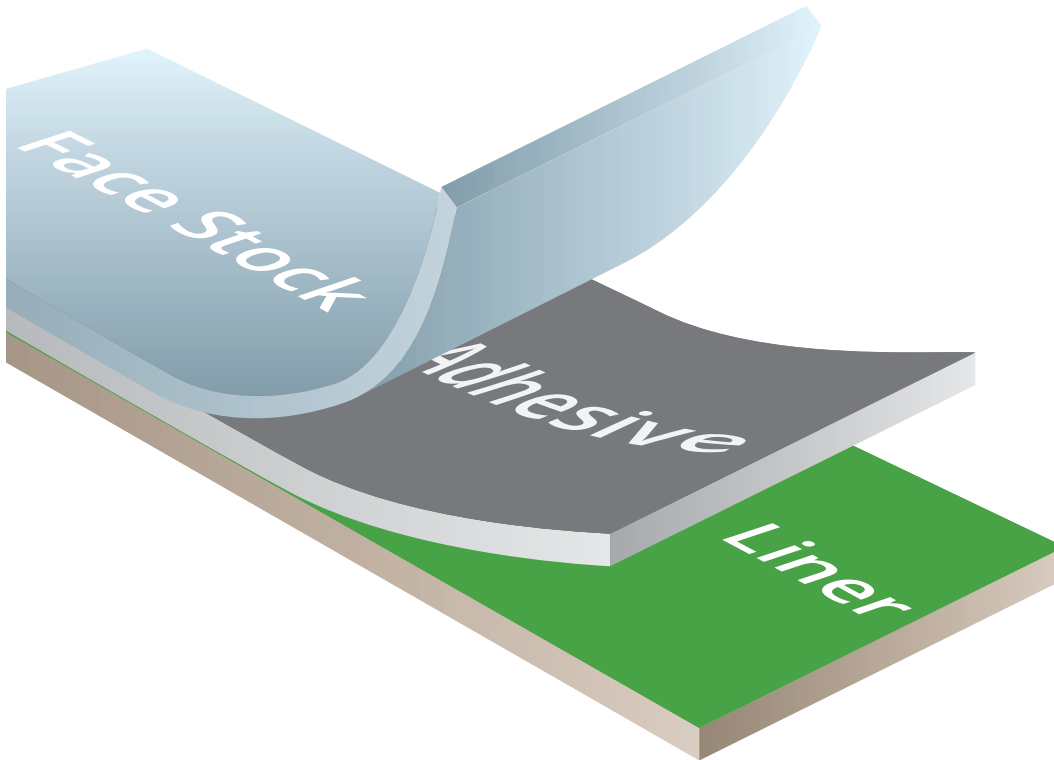

Face Stock: 1.0 mil print treated gloss clear polyester overlaminating film offers excellent resistance to scratches and abrasion. This material is designed to not shrink. It cannot be used in a fan fold application.

Adhesive: 0.7 mil general purpose permanent acrylic adhesive offering excellent scratch and smudge resistance.

Release Liner: 1.1 mil polyester liner designed to offer excellent performance.

Gloss Clear Polyester Overlaminating Film

OL1000 is designed for flexographic printing with the option for on demand thermal transfer printing of variable information. Key features include: indoor & outdoor applications, will not shrink, can be used as an overlaminate, and excellent smudge and scratch resistance. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements.

Typical Applications

- Shipping Labels
- Bags
- Corrugated Cardboard
- Packages

Typical Industry Sectors

- Automotive
- Electronics
- Industrial




www.identco.com

OL1000

Gloss Clear Polyester Overlaminating Film




Labels for Life.




Agency Recognitions

UL recognized with TT704 only



Adhesion

Stainless Steel	68.5 oz/in	754 N/m
Polypropylene	18.5 oz/in	204 N/m
ABS	39.7 oz/in	437 N/m




Material Caliper

Face Stock	.0010"	25.4μ	Liner(polyester)	.0011"	27.94μ
Adhesive	.0007"	17.78μ	Total Material	.0028"	71.12μ




Exterior Durability

Recommended: Indoor & outdoor use




Temperature Range

Service Temperature: -40°F to 300°F (-40°C to 149°C)
 Minimum Application Temperature: 50°F (10°C)




Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
 Shelf Life: 2 years @ recommended storage



Recommended Printing


Flexographic Printing
 Thermal Transfer Resin Ribbons



Chemical Resistance

Material was applied to stainless steel panels (dwell 24 hours) and immersed in chemicals for 4 hours and evaluated immediately after removal.

Chemical Agents	Visual Change	Edge Penetration
Tide	No visual change	.5 mm Edge Penetration
Oil	No visual change	0 mm Edge Penetration
Water	No visual change	0 mm Edge Penetration
Isopropyl Alcohol	No visual change	0 mm Edge Penetration
409 Cleaner	No visual change	.01 mm Edge Penetration
Toluene	No visual change	6.4 mm Edge Penetration



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
 Ingleside, IL 60041
 Phone: +1 (815) 385 - 0011
 Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
 14B, Col. Moisés Sáenz, 66613
 Apodaca, Nuevo Leon
 Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
 63450 Hanau
 Phone: +49 (6181) 440 830 - 0
 Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
 Cheung Sha Wan, Kowloon
 Phone: +852 2959 2156
 Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
 Hunza Tower Gurney Paragon
 Jalan Kelawei, Georgetown
 10250 Penang
 Phone: +6012 466 - 0866