


TT613



Labels for Life.

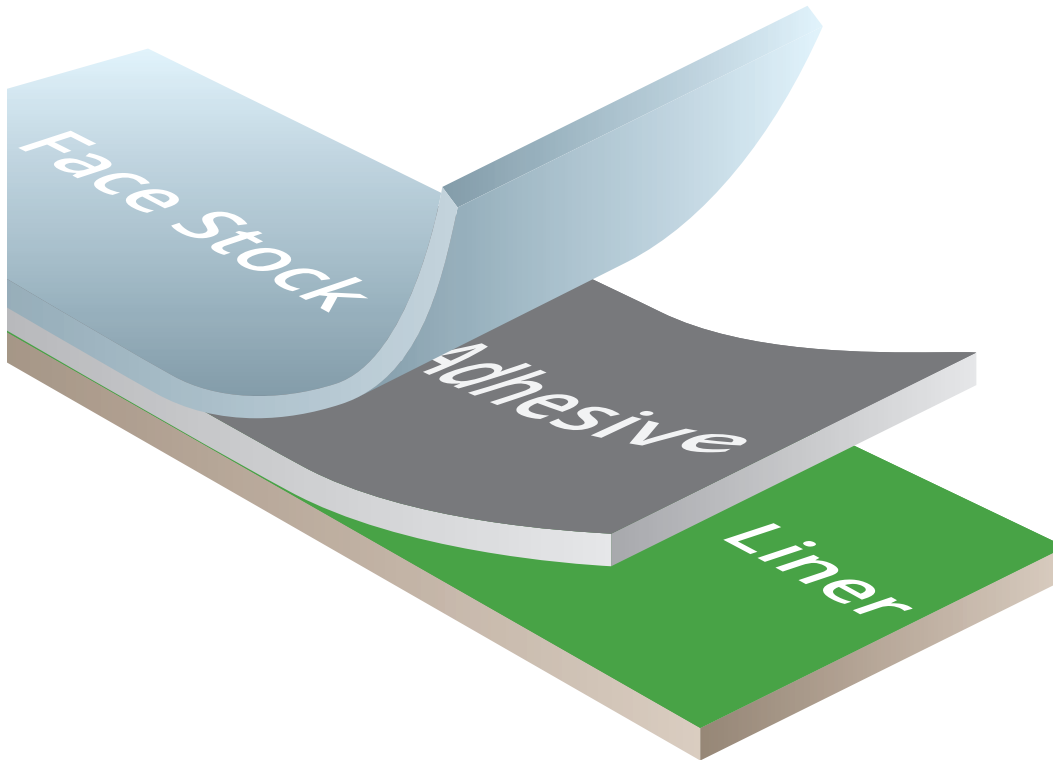

Face Stock: 2.3 mil gloss white biaxially-oriented coextruded polypropylene film.

Adhesive: 0.8 mil general purpose rubber based permanent adhesive that is designed to meet FDA 21 CFR 175.105 for indirect food contact.

Release Liner: 40# glassine liner designed to offer excellent performance.

Gloss White Polypropylene Film

TT613 is designed for UV and water based flexographic printing with the option of on demand thermal transfer printing of variable information. Key features include: indoor-only applications and resistance to moisture and smudging. When used in combination with the recommended IDENTCO inks or ribbon, it will meet the most demanding durable labeling requirements. Adhesive performance is determined by the substrate the label is applied to. Meets the requirements of FDA 21 CFR 175.105 for indirect food contact.

Typical Applications

Electronic Component Marking,
Laptops
Calculators
Cell Phones

Typical Industry Sectors

Automotive
Electronics
Industrial



www.identco.com

TT613


Gloss White Polypropylene Film



Labels for Life.

Agency Recognitions

	Adhesion	Peel Adhesion		Loop Tack		Peel Adhesion
	HDPE	4.4 lbs				
	Polypropylene	1.2 lbs	Stainless Steel	9.2 lbs		5.9 lbs
	Alkyd Enamel Paint	6.1 lbs				
	Aluminum	6.1 lbs				

	Material Caliper					
	Face Stock	.0023"	58.4μ	Liner(kraft)	.0023"	58.4μ
	Adhesive .	0008"	20.3μ	Total Material	.0054"	137.1μ

Exterior Durability

Indoor use only.
Testing is recommended in actual application.

Temperature Range

Service Temperature: -20°F to 200°F (-29°C to 93°C)
Minimum Application Temperature: 23°F (-5°C)

Shelf Life

Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

Recommended Printing

Pre-printing

- UV and water based flexographic
- Thermal Transfer Printing
- TTRR-A Ribbon

Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 3/7/2017.

UNITED STATES HEADQUARTERS
28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY
Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT
Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG
Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG
Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866