


# TT764



**Labels for Life.**

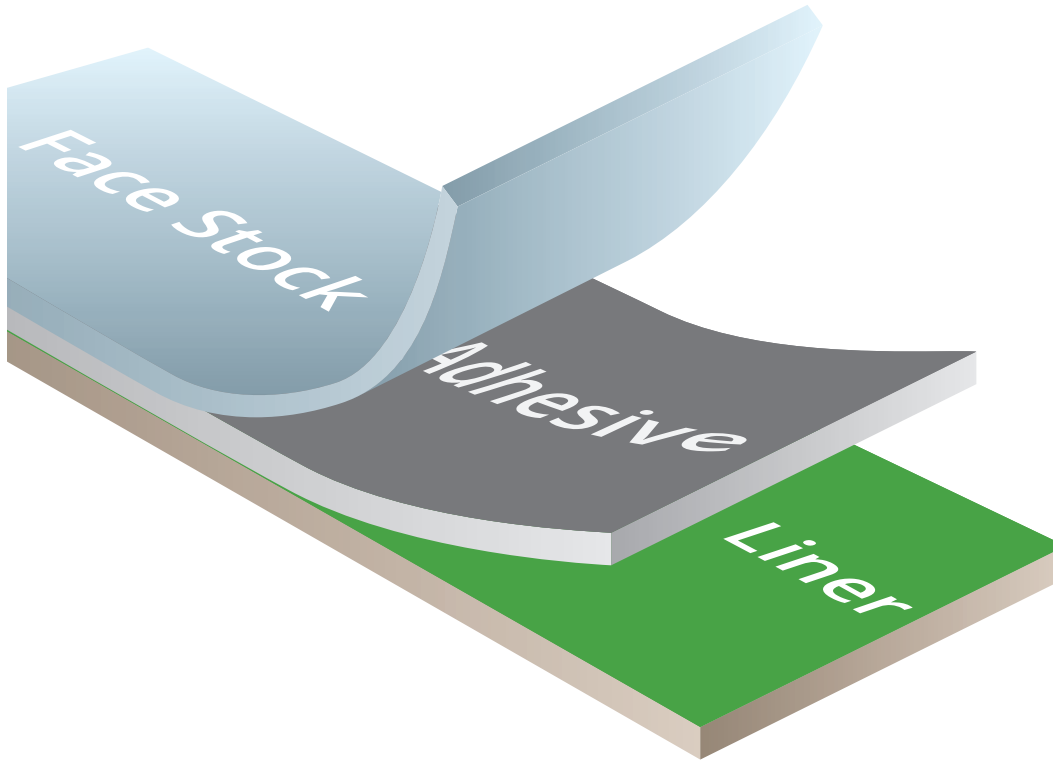

**Face Stock:** 3 mil topcoated gloss clear polyester film that offers excellent resistance to solvents and scratching. Specifically designed to be used as an over-laminate only.

**Adhesive:** 0.7 mil high performance permanent acrylic adhesive designed to offer excellent resistance to solvents and scratching.

**Release Liner:** 1.2 mil clear polyester release liner.

## Printable Gloss Clear Polyester Film

TT764 is designed to be a printable over-laminating film for use on durable applications that do not require thermal transfer printing. Key features include: added durability to base material, gloss finish, and excellent resistance to scratching and solvents. When used in combination with the recommended IDENTCO ink or ribbon, it will meet the most demanding durable labeling requirements. Preheating of the label surface will enhance the performance.

## Typical Applications

Over-laminate for harsh applications

## Typical Industry Sectors

Automotive  
Electronics  
Industrial




[www.identco.com](http://www.identco.com)


# TT764


Printable Gloss Clear Polyester Film



Labels for Life.


 **Agency Recognitions**

 **Adhesion**  
Stainless Steel                      42 oz/in                      462 N/m


 **Material Caliper**


Face Stock	.0030"	76.2μ	Liner (kraft/FL)	.0012"	30.5μ
Adhesive	.0007"	17.8μ	<b>Total Material</b>	<b>.0049"</b>	<b>124.5μ</b>


 **Exterior Durability**  
Recommended: Indoor use only

 **Temperature Range**  
Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)  
Minimum Application Temperature: 50 °F (10 °C)

 **Shelf Life**  
Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.  
Shelf Life: 2 years @ recommended storage

 **Recommended Printing**  
Resin Ribbon

 **Chemical Resistance**  
Testing can be completed upon request. Testing in actual application is recommended.

 **Process Durability**  
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 11/1/2016

**UNITED STATES HEADQUARTERS**

28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

**MEXICO MONTERREY**

Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

**GERMANY FRANKFURT**

Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

**PRC HONG KONG**

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019

**MALAYSIA PENANG**

Suite 163E, Level 16, Room 1602  
Hunza Tower Gurney Paragon  
Jalan Kelawei, Georgetown  
10250 Penang  
Phone: +6012 466 - 0866