


TT784



Labels for Life.

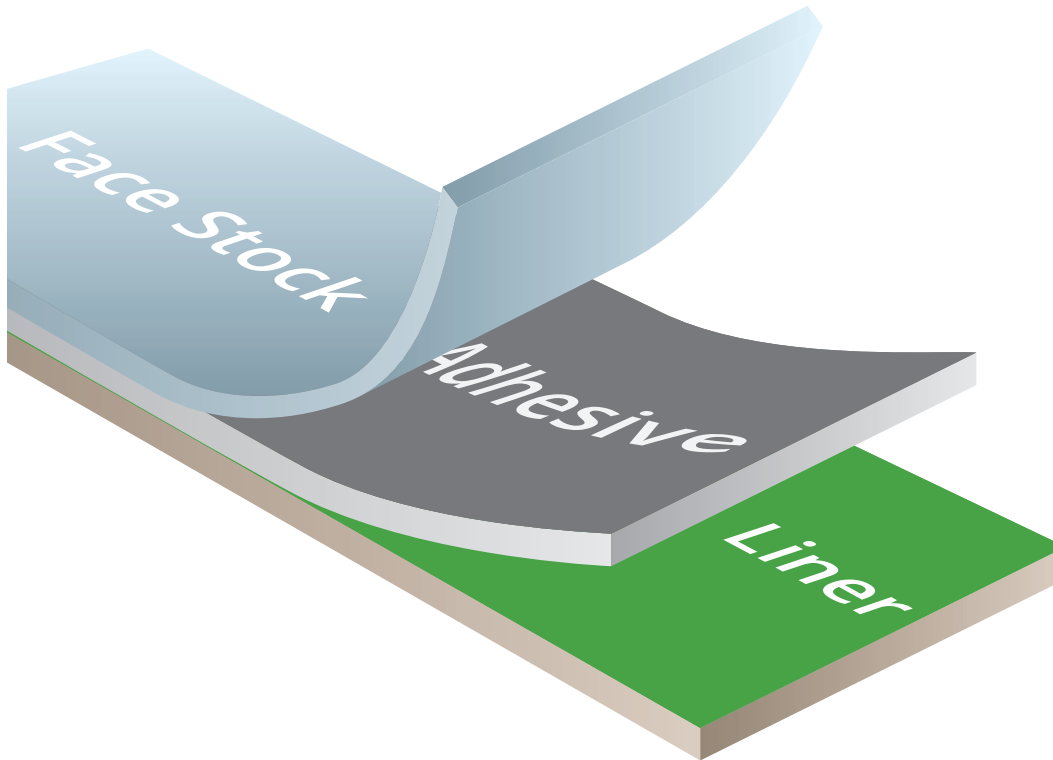

Face Stock: 1.0 mil topcoated gloss clear polyester that is designed to offer excellent solvent and scratch resistance..

Adhesive: 0.8 mil high performance permanent acrylic adhesive offering excellent scratch and smudge resistance. The adhesive has excellent clarity and is designed to resist yellowing.

Release Liner: 55# kraft liner designed to offer excellent performance.

Thermal Transfer Gloss Clear Polyester Film

TT784 is designed for on demand thermal transfer printing of variable information. Key features include: indoor and outdoor applications, resists yellowing, will not shrink, and excellent resistance to smudging, solvents and scratching. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements. Can be used for wire wraps. Testing recommended.

Typical Applications

Ideal overlam to be applied for pre-printed materials prior to die-cutting on materials for rating plates, nameplates, and finished product labels.

Typical Industry Sectors

Automotive
Electronics
Industrial



www.identco.com


TT784

Thermal Transfer Gloss Clear
Polyester Film




Labels for Life.

 **Agency Recognitions**
RoHS Directive Compliant 2002/95/EC


 **Adhesion**


Stainless Steel	41 oz/in	450 N/m	Polycarbonate	39 oz/in	430 N/m
HD Polyethylene	14 oz/in	150N/m	Polypropylene	29 oz/in	320 N/m
			LD Polyethylene	14 oz/in	150N/m


 **Material Caliper**


Face Stock	.0010"	25.40μ	Liner (kraft)	.0032"	81.30μ
Adhesive	.0008"	20.30μ	Total Material	.0050"	127.00μ

 **Exterior Durability**
Recommended: Indoor and outdoor use.
Outdoor testing recommended in actual application.

 **Temperature Range**
Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)
Minimum Application Temperature: 50 °F (10 °C)

 **Shelf Life**
Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

 **Recommended Printing**
Thermal Transfer Printing
TTRR-D
TTRR-V

 **Process Durability**
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 1/15/2018.

**UNITED STATES
HEADQUARTERS**

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

**MEXICO
MONTERREY**

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

**GERMANY
FRANKFURT**

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

**PRC
HONG KONG**

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

**MALAYSIA
PENANG**

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866