


# TT726



## Labels for Life.

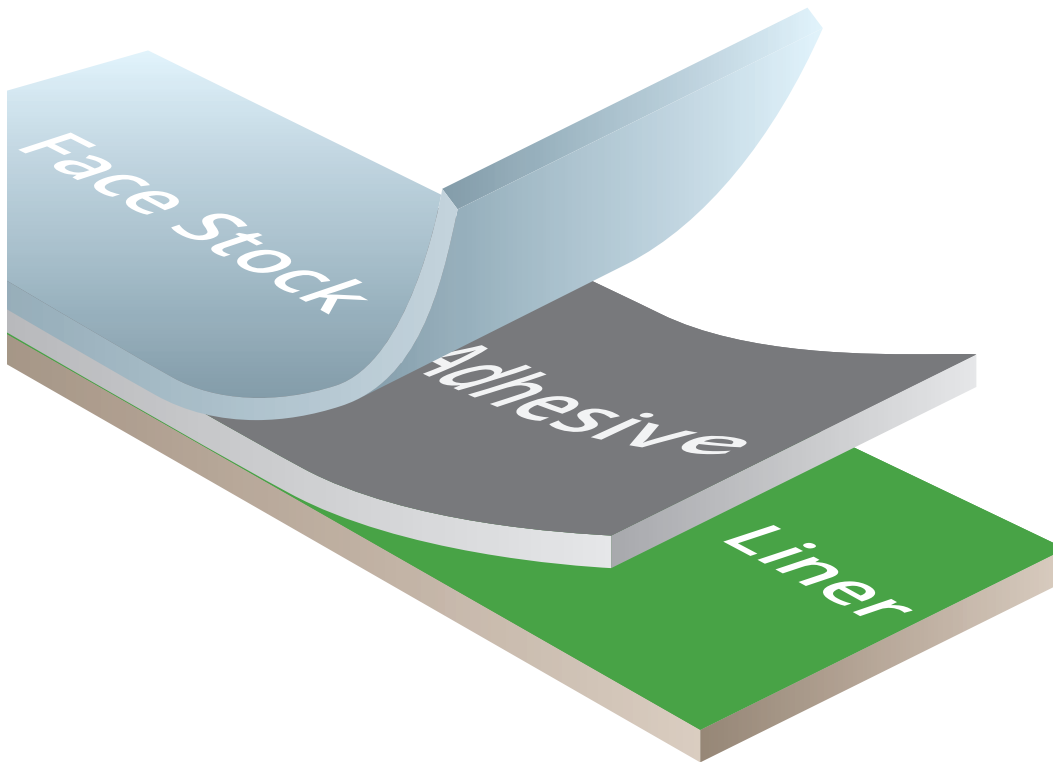

**Face Stock:** 3 mil topcoated ultra smooth white paper offers excellent resistance to smudging and scratching.

**Adhesive:** 0.8 high performance removable acrylic pressure sensitive adhesive.

**Release Liner:** 50# Kraft liner designed to offer excellent performance.

## Thermal Transfer Smooth White Paper With Removable Adhesive

TT726 is designed for UV flexographic printing with the option of thermal transfer printing of variable information. Key features include: indoor only applications, removability, ultra smooth topcoat and smudge and scratch resistance. When used in combination with the recommended IDENTCO ink or ribbon, it will meet the most demanding durable labeling requirements. This material is ideal for marking packages, corrugated cardboard, shipping labels and for printing barcodes on the ultra smooth topcoat.

## Typical Applications

Corrugated cardboard  
Shipping labels  
Product identification.

## Typical Industry Sectors

Automotive  
Electronics  
Industrial



[www.identco.com](http://www.identco.com)

# TT726

Thermal Transfer Smooth White Paper With Removable Adhesive



Labels for Life.



## Agency Recognitions



## Adhesion

Corrugated 9.6 oz/in 105.5 N/m  
HDPE 12.0 oz/in 132.0 N/m  
Glass 14.4 oz/in 158.4 N/m



## Material Caliper

Face Stock	.0030"	76.2μ	Liner(natural kraft)	.0025"	63.5μ
Adhesive	.0008"	20.3μ	<b>Total Material</b>	<b>.0063"</b>	<b>160.0μ</b>



## Exterior Durability

Recommended: Indoor use only



## Temperature Range

Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)  
Minimum Application Temperature: 50 °F (10 °C)



## Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.  
Shelf Life: 2 years @ recommended storage



## Recommended Printing

Pre-printing • UV flexographic inks  
Thermal Transfer Printing • TTR Series



## Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 7/20/2017.

### UNITED STATES HEADQUARTERS

28164 W. Concrete Drive  
Ingleside, IL 60041  
Phone: +1 (815) 385 - 0011  
Fax +1 (815) 385 - 0359

### MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior  
14B, Col. Moisés Sáenz, 66613  
Apodaca, Nuevo Leon  
Phone: +52 (81) 8008 - 0438

### GERMANY FRANKFURT

Güterbahnhofstrasse 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

### PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019

### MALAYSIA PENANG

Suite 163E, Level 16, Room 1602  
Hunza Tower Gurney Paragon  
Jalan Kelawei, Georgetown  
10250 Penang  
Phone: +6012 466 - 0866