


# CP6600



**Labels for Life.**

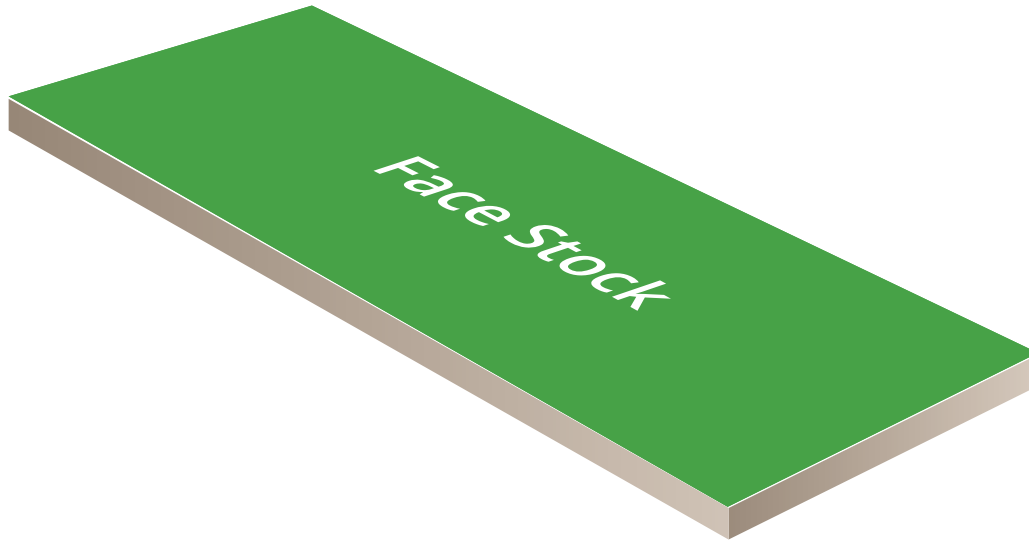

**Face Stock:** 6 mil clear velvet textured polyester is designed with no adhesive to allow for the use of various adhesives depending on the application requirements. The material is scratch and solvent resistant, and can be used in indoor or outdoor applications.

## Clear Velvet Textured Polyester Film

CP6600 is specifically designed with no adhesive to allow for various adhesives based on the requirements of the application. Key features include: indoor and outdoor applications, velvet textured surface, UV properties, and excellent solvent and scratch resistance. When used in combination with the recommended IDENTCO adhesives, it will meet the most demanding durable labeling applications.

## Typical Applications

Nameplates and membrane or standard overlays requiring sub-surface printing

## Typical Industry Sectors

Automotive  
Electronics  
Industrial



[www.identco.com](http://www.identco.com)

# CP6600

Clear Velvet Textured Polyester Film



Labels for Life.



## Agency Recognitions

RoHS Directive Compliant 2002/95/EC



## Adhesion

No adhesive.



## Material Caliper

Face Stock	.006"	150.0μ
<b>Total Material</b>	<b>.006"</b>	<b>150.0μ</b>



## Exterior Durability

Recommended: 3 years outdoor



## Temperature Range

Service Temperature: -40 °F to 240 °F (-40 °C to 116 °C)  
Minimum Application Temperature: None Due to No Adhesive



## Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75%R.H.  
Shelf Life: 2 years @ recommended storage



## Recommended Printing

Screen printed with non-polyester inks.



## Chemical Resistance

Testing can be completed upon request.



## Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 06/18/18.

### UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,  
Ingleside, IL 60041 USA  
Phone: +1 (815) 385 - 0011  
Fax + (815) 385 - 0359

### MEXICO MONTERREY

Carretera a Laredo KM 16.5  
Interior 14B Col. Moises Saenz  
Apodaca, Nuevo Leon CP 66613  
Phone: +51 (81) 8008 - 0438

### EUROPE GERMANY

Güterbahnhofstraße 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

### ASIA HONG KONG

Unit 1208, 12/F, Grand City Plaza  
Tsuen Wan, New Territories  
Phone: +852 2959 2156  
Fax: +852 2959 2019