


TT747A



Labels for Life.

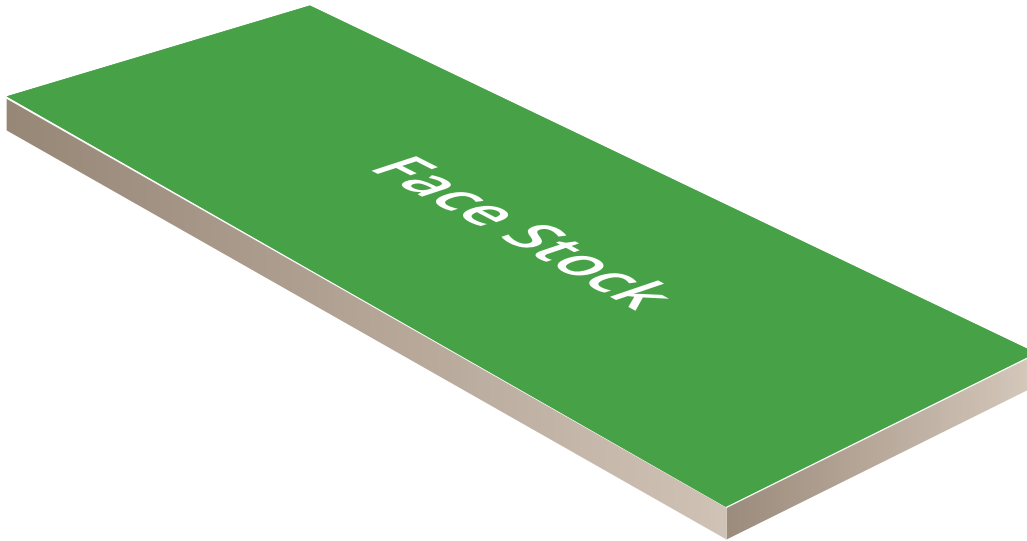

Face Stock: 10 mil topcoated matte white synthetic with no adhesive offers great durability and resistance to moisture, tearing and solvents. Specifically designed as an opaque calcium carbonate reinforced material. The material is designed to be thermal transfer printed.

Thermal Transfer Matte White Synthetic Tag

TT747A is designed for on-demand thermal transfer printing of variable information. Key features include: indoor and limited outdoor applications (recommended to test in actual outdoor application), extremely durable and excellent resistance to tearing, moisture, solvents and abrasion. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements. The material is designed as an opaque calcium carbonate reinforced material.

Typical Applications

Hanging tags, bin markers,
product identification
and spacers.

Typical Industry Sectors

Automotive
Electronics
Industrial



www.identco.com

TT747A

Thermal Transfer Matte White Synthetic Tag



Labels for Life.



Agency Recognitions

RoHS Directive Compliant 2002/95/EC



Adhesion

No adhesive.



Material Caliper

Face Stock	.0010"	254.0 μ
Total Material	.0010"	254.0μ



Exterior Durability

Recommended: Indoor use only
Outdoor: 2 months outdoor exposure, testing recommended in actual application



Temperature Range

Service Temperature: -25 °F to 180 °F (-32 °C to 82 °C)
Minimum Application Temperature: None



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75%R.H.
Shelf Life: 2 years @ recommended storage



Recommended Printing

Thermal transfer printing.
Recommended ribbons: TTRR-A, TTRR-V



Chemical Resistance

Testing can be completed upon request.



Process Durability

	Machine Direction	Cross Direction
Tensile Strength	3880 psi	2380 psi
Elongation	490%	75%

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 06/19/18.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,
Ingleside, IL 60041 USA
Phone: +1 (815) 385 - 0011
Fax + (815) 385 - 0359

MEXICO MONTERREY

Carretera a Laredo KM 16.5
Interior 14B Col. Moises Saenz
Apodaca, Nuevo Leon CP 66613
Phone: +51 (81) 8008 - 0438

EUROPE GERMANY

Güterbahnhofstraße 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

ASIA HONG KONG

Unit 1208, 12/F, Grand City Plaza
Tsuen Wan, New Territories
Phone: +852 2959 2156
Fax: +852 2959 2019