


CP2007/ TA1510



Labels for Life.

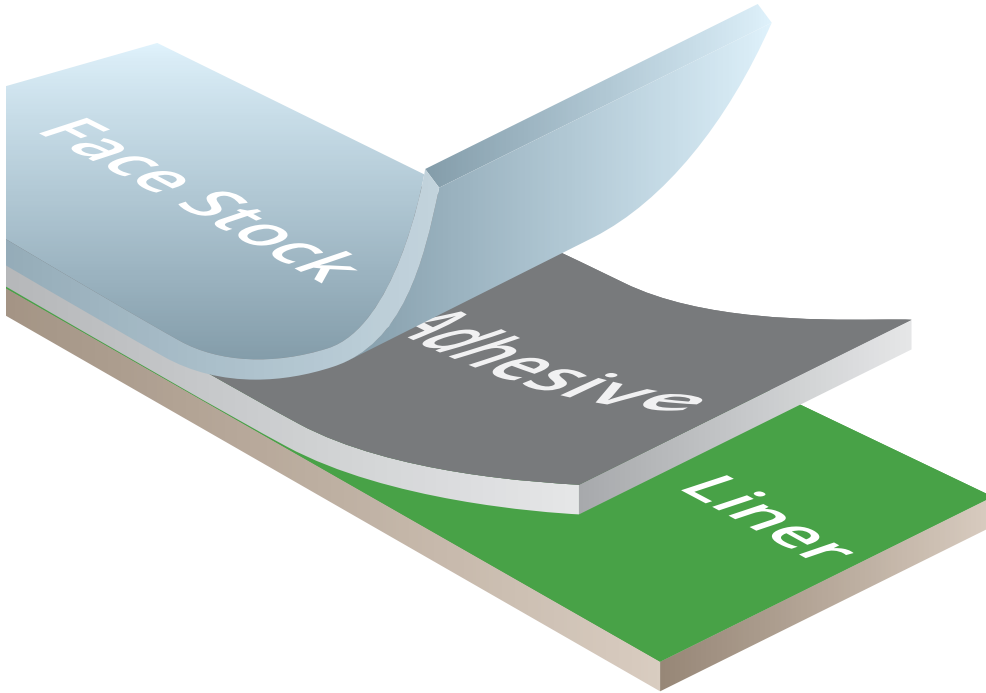

Face Stock: 3 mil gloss clear polyester film.

Adhesive: 3.4-3.5 mil high-performance permanent acrylic adhesive. (Construction: 1 mil adhesive, 1 mil carrier, 1.4-1.5 mil adhesive)

Liner: 60# kraft release liner.

Gloss Clear Polyester Film

CP2007/TA1510 is a two-part material construction that includes a polyester film specifically designed to be UV flexographic printed, with a transfer adhesive applied to the clear polyester after second-surface printing to create a complete pressure-sensitive sub-surface label or overlay. Key features include a shrink-free label that exhibits excellent solvent, abrasion and scuff resistance. When this construction is used in combination with the recommended IDENTCO inks, it will meet the most demanding durable labeling requirements.

Typical Applications

- Nameplates
- Serial identification labels
- Rating plates
- Property identification
- Harsh environments

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

CP2007/TA1510

Gloss Clear Polyester Film



Labels for Life.



Agency Recognitions



Adhesion

Stainless Steel 89.6 oz.in 985.6 N/m



Material Caliper

Face Stock	.0030"	76.2 μ	Liner	.0031"	78.7 μ
Adhesive	.0034"- .0035"	86.4 μ -88.9 μ	Total Material	.0095"- .0096"	241.3 μ -243.8 μ



Exterior Durability

Recommended: Indoor use only.



Temperature Range

Service Temperature: -40 °F to 300 °F (-40 °C to 149 °C)
Minimum Application Temperature: 50 °F (-10 °C)



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75%R.H.
Shelf Life: 2 years @ recommended storage



Recommended Printing

Flexo printed. No variable printing.



Chemical Resistance

Testing can be completed upon request.



Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/05/18.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,
Ingleside, IL 60041 USA
Phone: +1 (815) 385 - 0011
Fax + (815) 385 - 0359

MEXICO MONTERREY

Carretera a Laredo KM 16.5
Interior 14B Col. Moises Saenz
Apodaca, Nuevo Leon CP 66613
Phone: +51 (81) 8008 - 0438

EUROPE GERMANY

Güterbahnhofstraße 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

ASIA HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019