


# L322



**Labels for Life.**

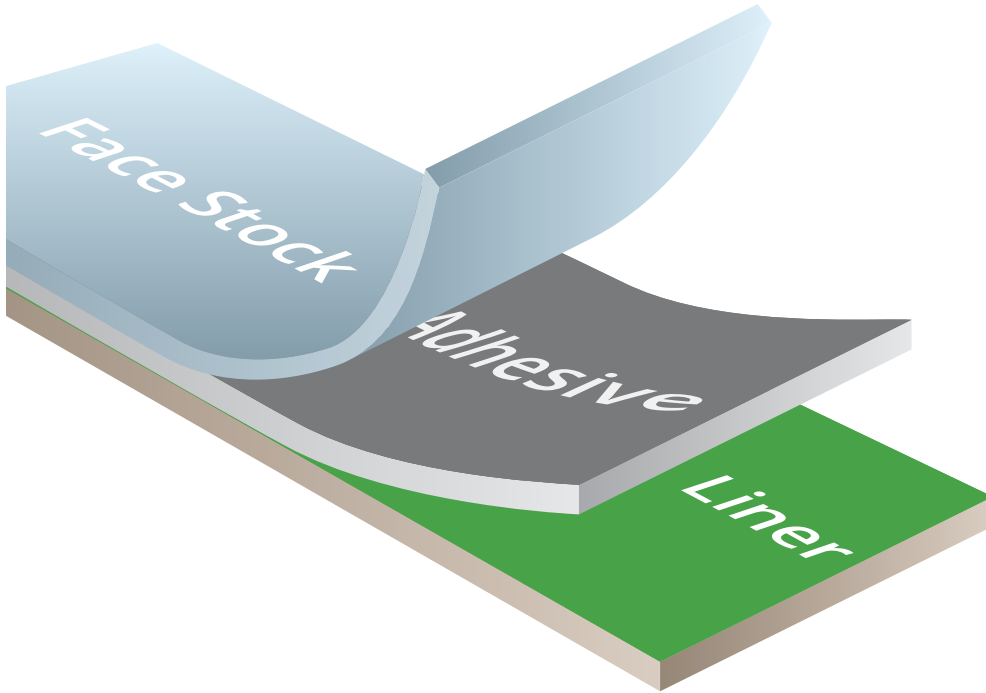

**Face Stock:** 2.0 mil non-printable chrome aluminum foil film with excellent conformability. Ideal for use on flat or curved surfaces. Dimensionally stable film for no shrinkage.

**Adhesive:** 2.0 mil heavy-coat-weight high-strength permanent acrylic adhesive.

**Release Liner:** 2.0 mil polyester liner designed to offer excellent performance for both manual and automatic application.

## Non-Printable Chrome Aluminum Foil Film

L322 is designed for applications requiring excellent adhesion and conformability. Caution: This is a soft aluminum material and will indent very easily. To be printable it must be laminated with a thermal transfer material.

## Typical Applications

- Nameplates
- Asset labels
- Finished product labels
- Rating plates
- Product identification
- Electronic component marking

## Typical Industry Sectors

- Automotive
- Electronics
- Industrial



[www.identco.com](http://www.identco.com)

# L322

## Non-Printable Chrome Aluminum Foil Film



Labels for Life.



### Agency Recognitions

RoHS Directive Compliant 2002/95/EC



### Adhesion

Stainless Steel:	69 oz/in	750 N/ml	Polypropylene:	12 oz/in	132 N/m
Glass:	73 oz/in	800 N/m	Acrylic	75 oz/in	825 N/m



### Material Caliper

Face Stock	.0020"	50.8μ	Liner (polyester)	.0020"	50.8μ
Adhesive	.0020"	50.8μ	Total Material	.0060"	152.4μ



### Exterior Durability

No testing done at this time.



### Temperature Range

Service Temperature: -40°F to 356°F (-40°C to 180°C)  
Intermittent: Up to 750°F (399°C)  
Five minute: Up to 500°F (260°C)



### Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75%R.H.  
Shelf Life: 2 years @ recommended storage



### Recommended Printing

Non printable.



### Process Durability

It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/02/18.

#### UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,  
Ingleside, IL 60041 USA  
Phone: +1 (815) 385 - 0011  
Fax + (815) 385 - 0359

#### MEXICO MONTERREY

Carretera a Laredo KM 16.5  
Interior 14B Col. Moises Saenz  
Apodaca, Nuevo Leon CP 66613  
Phone: +51 (81) 8008 - 0438

#### EUROPE GERMANY

Güterbahnhofstraße 3-7  
63450 Hanau  
Phone: +49 (6181) 440 830 - 0  
Fax: +49 (6181) 440 830 - 99

#### ASIA HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.  
Cheung Sha Wan, Kowloon  
Phone: +852 2959 2156  
Fax: +852 2959 2019