

OL1000(P)




Labels for Life.

Face Stock: 1.0 mil gloss clear polyester overlaminating film offers excellent resistance to scratches and abrasion. This material is designed to not shrink. It cannot be used in a fan fold application.

Adhesive: 0.9-1.0 mil general purpose permanent acrylic adhesive offering excellent scratch, heat, and smudge resistance.

Release Liner: 1.0 mil polyester liner designed to offer excellent performance.

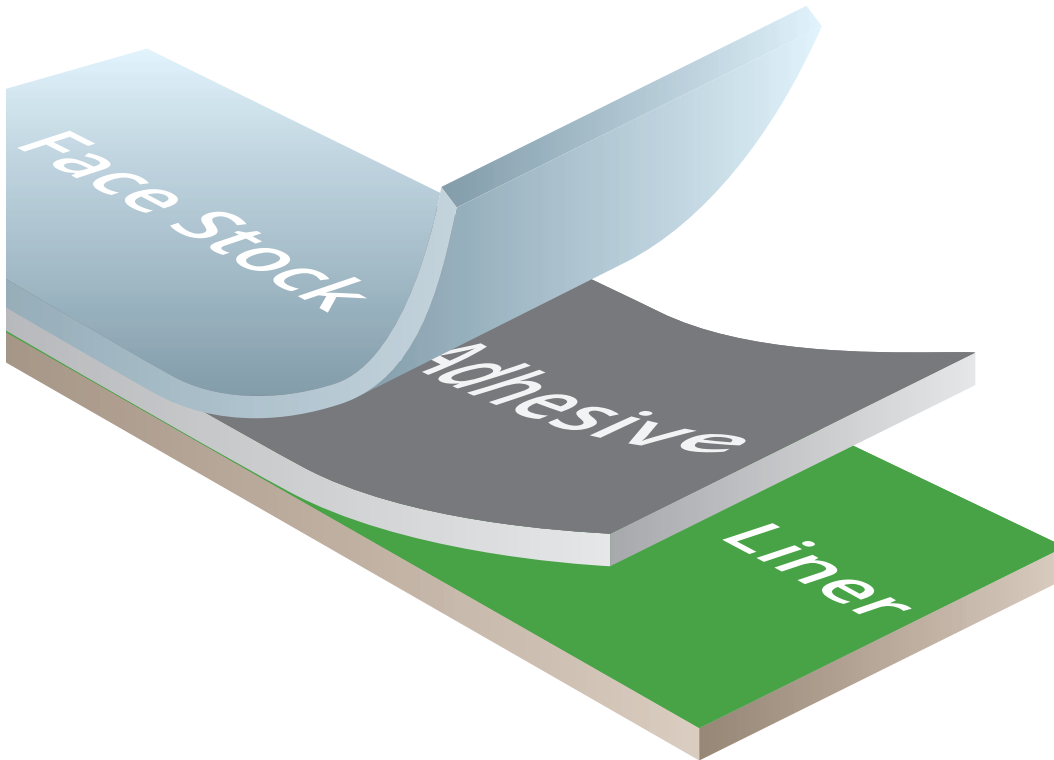

Gloss Clear Polyester Non-printable Overlaminating Film

OL1000(P) is designed to be used as an overlaminate only. Key features include: indoor and outdoor applications, will not shrink, and excellent smudge and scratch resistance. When used in combination with the recommended IDENTCO materials, it will meet the most demanding durable labeling requirements.

Typical Applications

- Compliance labels for electronics
- Nameplates
- Protection in harsh environments
- High gloss appearance labeling.

Typical Industry Sectors

- Automotive
- Electronics
- Industrial




www.identco.com


OL1000(P)

Gloss Clear Polyester Non-Printing
Overlaminating Film




Labels for Life.


 **Agency Recognitions**
100% RoHS Compliant


 **Adhesion**


Stainless Steel	34 oz/in	374 N/m
Acrylic	45 oz/in	495 N/m


 **Material Caliper**


Face Stock	.0010"	25.4μ	Liner(polyester)	.0010"	25.4μ
Adhesive	.0009"/.0010"	22.8/25.4μ	Total Material	.0029/.0030"	73.7/76.2μ

 **Exterior Durability**
Material Only: 2 Years
Material w/ TTRR-D Ribbon: 2 Years

 **Temperature Range**
Service Temperature: -40°F to 300°F (-40°C to 149°C)
Minimum Application Temperature: 50°F (10°C)

 **Shelf Life**
Recommended Storage: 45-90°F (7-32°C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage

 **Recommended Printing**
Non-Printable

 **Process Durability**
It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 8/2/2017.

**UNITED STATES
HEADQUARTERS**

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

**MEXICO
MONTERREY**

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

**GERMANY
FRANKFURT**

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

**PRC
HONG KONG**

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

**MALAYSIA
PENANG**

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866