


TA7952



Labels for Life.

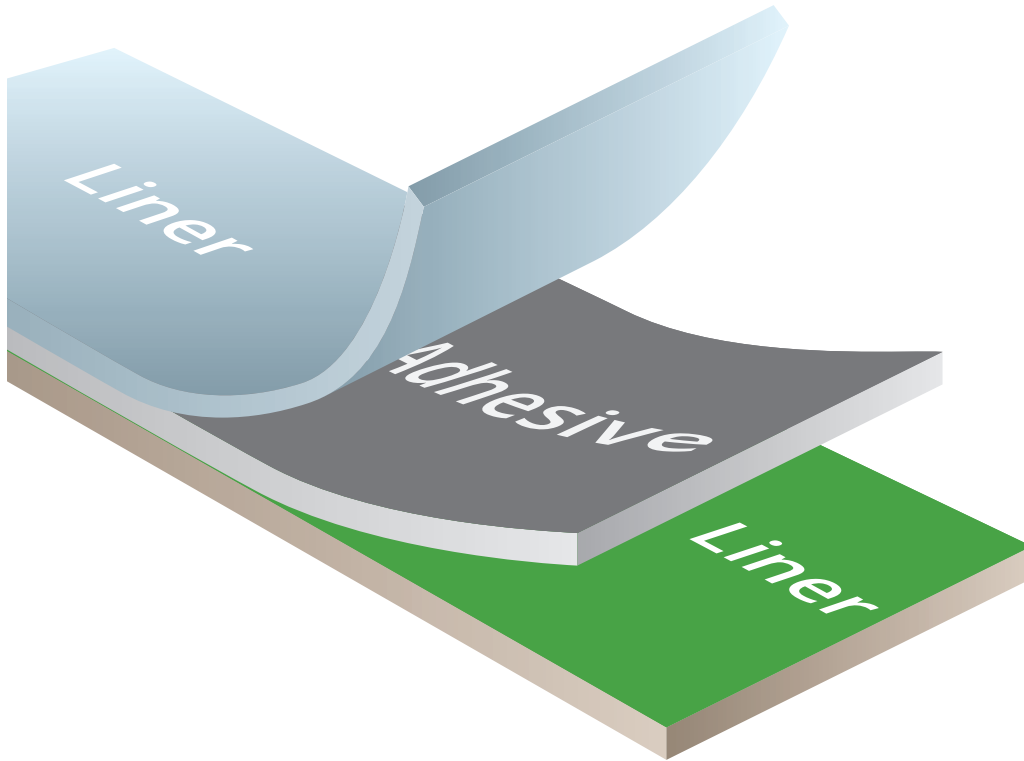

Release Liner: Available with a 4.2 mil 58# polycoated kraft double liner for adhesive cut-outs or adhesive only parts.

Adhesive: 2.3 mil clear high performance permanent pressure sensitive acrylic that is specifically designed for optimal adhesion.

Release Liner: Available with a 4.2 mil 58# polycoated kraft double liner for adhesive cut-outs or adhesive only parts.

Clear Transfer Adhesive Tape

TA7952 is a permanent pressure sensitive adhesive that is specifically designed to offer high bond strength. Key features include: selective adhesive applications, high temperature and harsh environment resistance, and extremely high clarity. When used in combination with the recommended IDENTCO material, it will meet the most demanding durable labeling requirements.

Typical Applications

- Graphic overlays
- Membrane switches
- Parts requiring selective adhesive areas.

Typical Industry Sectors

- Automotive
- Electronics
- Industrial



www.identco.com

TA7952

Clear Transfer Adhesive Tape



Labels for Life.



Agency Recognitions

100% RoHS Compliant



Adhesion

Testing in actual application recommended.



Material Caliper

Liner	.0042"	106.68μ	Liner	.0042"	106.68μ
Adhesive	.0023"	58.42μ	Total Material	.0065"	165.10μ



Shelf Life

Recommended Storage: 45-90 °F (7-32 °C) 20-75% R.H.
Shelf Life: 2 years @ recommended storage



Temperature Range

Service Temperature: -40 °F to 302 °F (-40 °C to 150 °C)
Minimum Application Temperature: 50 °F (10 °C)

- Short term (minutes/hours) 400 °F (204 °C)
- Long term (days/weeks) 300 °F (140 °C)



Exterior Durability

Recommended: Indoor and outdoor use
• Outdoor use performance depends on the substrate.



Process Durability

It is recommended that customers test this material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 07/12/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY

Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT

Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG

Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019

MALAYSIA PENANG

Suite 163E, Level 16, Room 1602
Hunza Tower Gurney Paragon
Jalan Kelawei, Georgetown
10250 Penang
Phone: +6012 466 - 0866