


CP3205Y

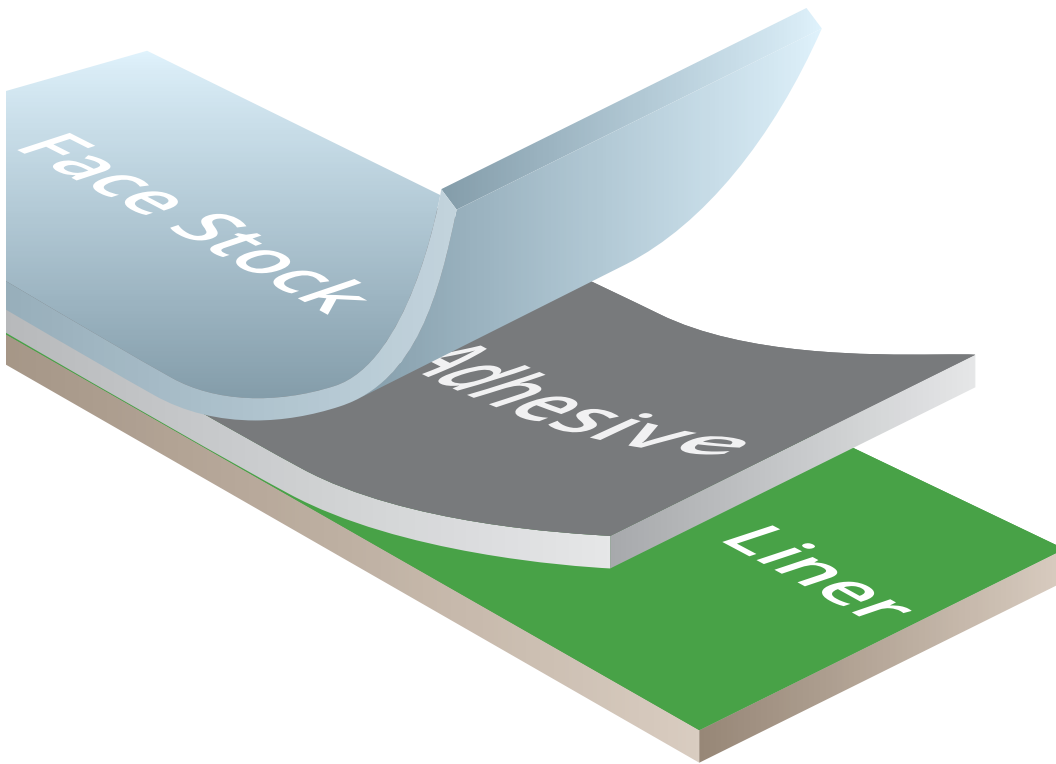

Labels for Life.

Face Stock: 3.5 mil flexible matte yellow vinyl provides exceptional surface smoothness and conformability. The material offers excellent resistance to moderate temperatures and harsh abrasions.

Adhesive: 1.0 mil permanent pressure-sensitive acrylic adhesive provides excellent adhesion to high-surface-energy plastics, painted metal, powder-coated paint, polycarbonates and fiberglass. The adhesive offers excellent resistance to high temperatures and harsh abrasions.

Release Liner: 90# polycoated kraft lay flat liner.

Flexible Yellow Vinyl Film

CP3205Y is specifically designed to be UV Screen & Flexo printable and withstand the harsh environments of the Outdoor Power industry. Key features include: outdoor-power compliant, heavy-duty adhesive, excellent abrasion and heat resistance, conformable and it will not shrink. When used in combination with the recommended IDENTCO inks it will meet the most demanding durable labeling requirements needed to exceed Outdoor Power Equipment compliance regulations.

Typical Applications

- Outdoor Power Equipment
- Compliance Labeling
- Nameplates
- Fiberglass, Polycarbonates
- Powder-Coated Paint, & Plastics

Typical Industry Sectors

- Outdoor Power Equipment
- Power Tools
- Appliances











www.identco.com

CP3205Y

Flexible Yellow Vinyl Film



Labels for Life.

	Agency Recognitions 100% RoHS compliant
	Adhesion Stainless Steel 60 oz/in 660 N/m Acrylic 70 oz/in 770 N/m Polypropylene 15 oz/in 164 N/m Glass 61 oz/in 671 N/m
	Material Caliper Face Stock .0035" 88.9µ Adhesive .0010" 25.4µ Liner (kraft) .0069" Total Material .0076" 193.1µ
	Exterior Durability Material Only: Indoor & 2 year outdoor durability
	Temperature Range Service Temperature: -40°F to 176°F (-40°C to 80°C) Minimum Application Temperature: 50°F (10°C)
	Shelf Life Recommended Storage: 45-90°F (7-32°C) 20-75% R.H. Shelf Life: 2 years @ recommended storage
	Recommended Inks UV Flexo UV Screen
	Process Durability It is recommended that customers test this material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 06/11/18.

UNITED STATES HEADQUARTERS
28164 W. Concrete Drive
Ingleside, IL 60041
Phone: +1 (815) 385 - 0011
Fax +1 (815) 385 - 0359

MEXICO MONTERREY
Carr. a Laredo Km. 16.5 Interior
14B, Col. Moisés Sáenz, 66613
Apodaca, Nuevo Leon
Phone: +52 (81) 8008 - 0438

GERMANY FRANKFURT
Güterbahnhofstrasse 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

PRC HONG KONG
Unit 1708, 17/F, 9 Wing Hong St.
Cheung Sha Wan, Kowloon
Phone: +852 2959 2156
Fax: +852 2959 2019