


TT748



Labels for Life.

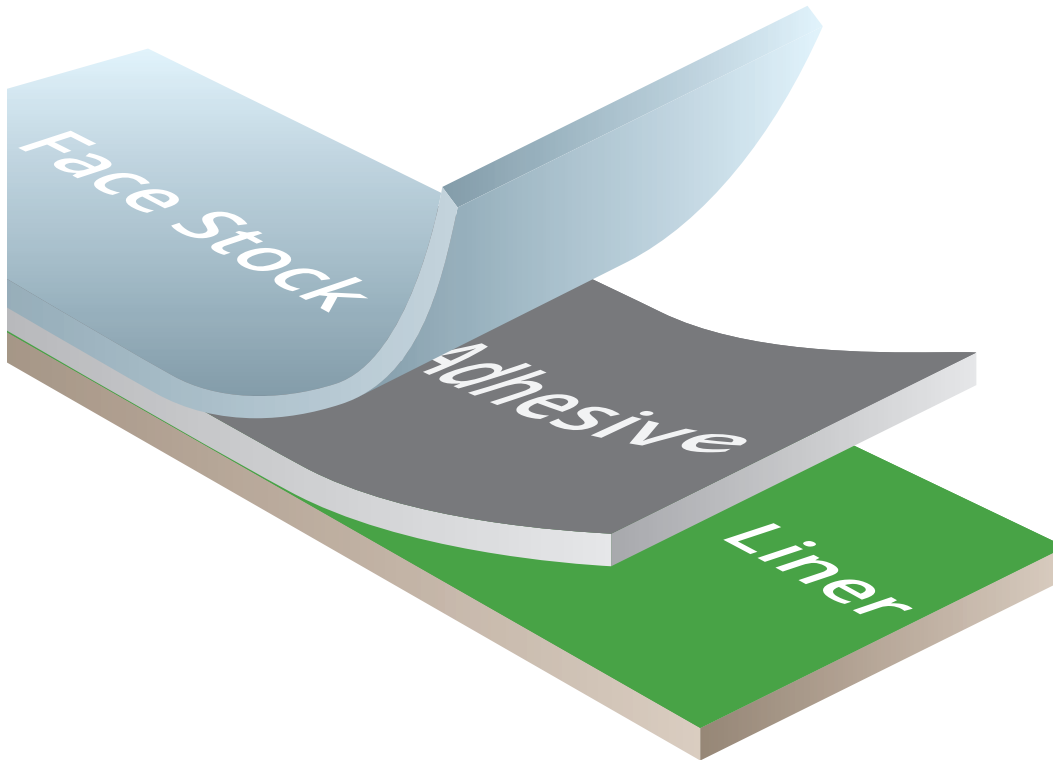

Face Stock: 2.4 mil topcoated matte white polyester offers excellent resistance to smudges, solvents and abrasion resistance.

Adhesive: 0.9 mil high performance permanent acrylic adhesive offering excellent solvent, smudge and abrasion resistance.

Release Liner: 50# kraft liner or a 1.5 mil polyester liner (FL) designed to offer excellent performance for both manual and automatic application.

Thermal Transfer Matte White Polyester Film

Key features include: indoor and outdoor applications, will not shrink and excellent chemical, smudge and abrasion resistance. When used in combination with the recommended IDENTCO ribbon, it will meet the most demanding durable labeling requirements.

Typical Applications

Name plates
Rating Plates
Serial identification labels
Industrial Barcodes
Electronic Components Marking

Typical Industry Sectors

Automotive
Electronics
Industrial












identco.com

TT748

Thermal Transfer Matte White
Polyester Film



Labels for Life.

	Agency Recognitions UL: PGJ12.MH16873 CSA 089882 CUL MH16873
	Adhesion Stainless Steel 55 oz/in 605 N/m Acrylic 68 oz/in 748 N/m Polypropylene 12 oz/in 132 N/m Glass 56 oz/in 616 N/m
	Material Caliper Face Stock .0024" 61.0μ Adhesive .0008"/.0009" 20.3/22.9μ Liner(kraft/FL) .0031"/.0015" 78.7/38.1μ Total Material .0063"/.0048" 160.0/122.0μ
	Exterior Durability Material Only: 2 Years
	Temperature Range Service Temperature: -40°F to 302°F (-40°C to 150°C) Minimum Application Temperature: 50°F (10°C)
	Shelf Life Recommended Storage: 45-90°F (7-32°C) 20-75% R.H. Shelf Life: 2 years @ recommended storage
	Recommended Ribbon(s) TTRR-CR TTRR-V TTRR-R TTRR-B TTRR-N
	Chemical Resistance Chemical Resistance testing can be done on actual application upon request.
	Process Durability It is recommended that customers test the material in actual application to determine if the material meets all requirements.

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by IDENTCO customers for designs and specifications, or be relied on as meeting specific performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact IDENTCO for further information. Revised 7/27/2017.

UNITED STATES HEADQUARTERS

28164 W. Concrete Drive,
Ingleside, IL 60041 USA
Phone: +1 (815) 385 - 0011
Fax + (815) 385 - 0359

MEXICO MONTERREY

Carretera a Laredo KM 16.5
Bodega 14B Colonia Moisés Sáenz
Apodaca, Nuevo León CP 66613
Phone: +52 (81) 8008 - 0438

EUROPE GERMANY

Güterbahnhofstraße 3-7
63450 Hanau
Phone: +49 (6181) 440 830 - 0
Fax: +49 (6181) 440 830 - 99

ASIA PRC

Unit 1208, 12/F, Grand City Plaza
No.1-17 Sai Lau Kok Road
Tsuen Wan, New Territories, Hong Kong
Phone: +852 2959 2156 • Fax: +852 2959 2019