


ELR-100

Rewinders

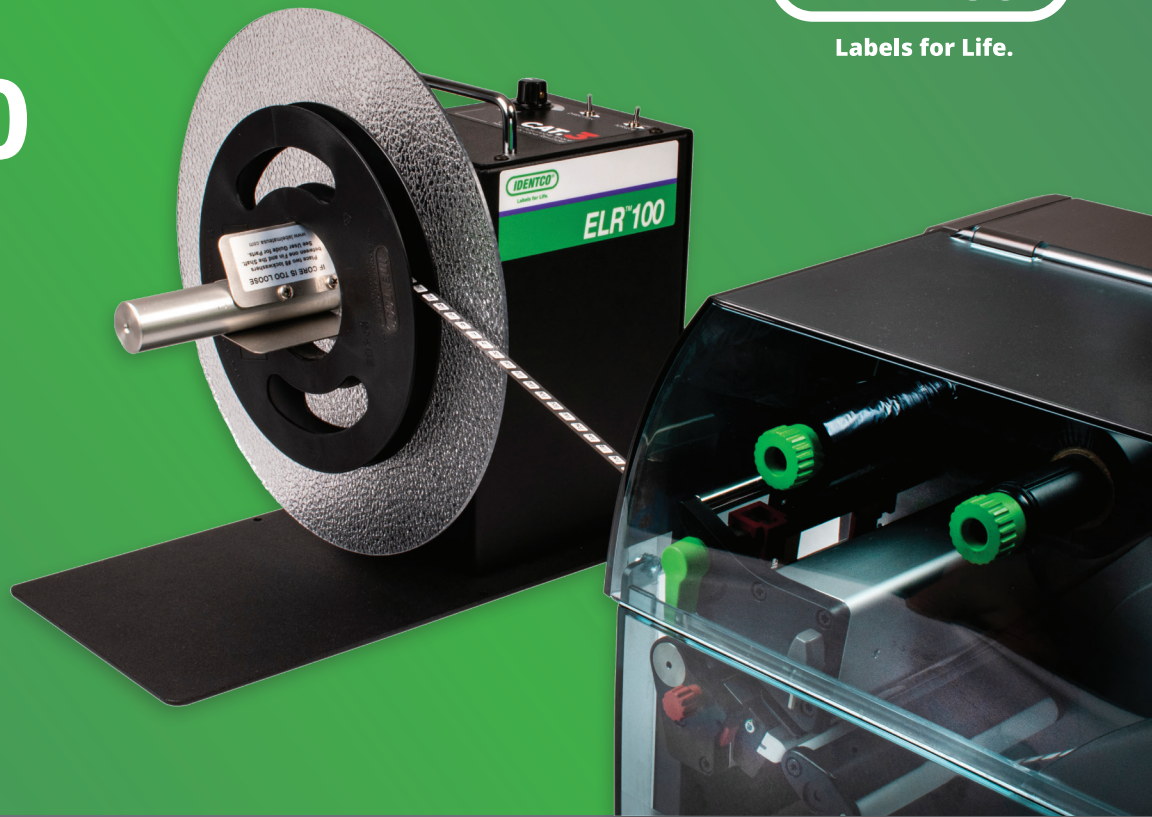

Rewinders present the perfect answer to a wide range of tasks. These Rewinders offer bidirectional functionality and come with comprehensive speed and torque management. They operate almost silently. Moreover, their motors lack gears or clutches, making them capable of being stopped indefinitely without any damage.

Features and Benefits

- Noiseless
- Controls for Dual Torque Ranges and Direction
- Innovative Constant Adjustable Torque
- Speed Control Adjustable up to 30 inches (760 mm) per second
- Keeps tension on the web to ensure good label registration

Technical Data

Part Number	ELR-100
Max Roll Diameter (in)	11 (279-mm)
Core Diameter (in)	1 - 4 (25 - 102-mm) ¹
Max Media Width (in)	6 (152-mm)
Max Roll Weight (lbs)	17 (8-kg)
Dimensions-HWD (in)	27 (12.2-kg)
Weight (lbs)	230 (5842-mm)
Max Speed (ips)	0.5 (13-mm)
Min Speed (ips)	
Max Torque (in-oz) ^{2,3}	183
Max RPM ²	388
Number of Flanges	1
Power Specifications ²	120 - 220VAC in, 12VAC 40W Out
Warranty	
Available Options	<ul style="list-style-type: none"> • APG-CAT (Paper Guide) • HTO-CAT (Hi-Torque Option) • LTO-CAT (Lw-Torque Option) • FOOTSWITCH

